







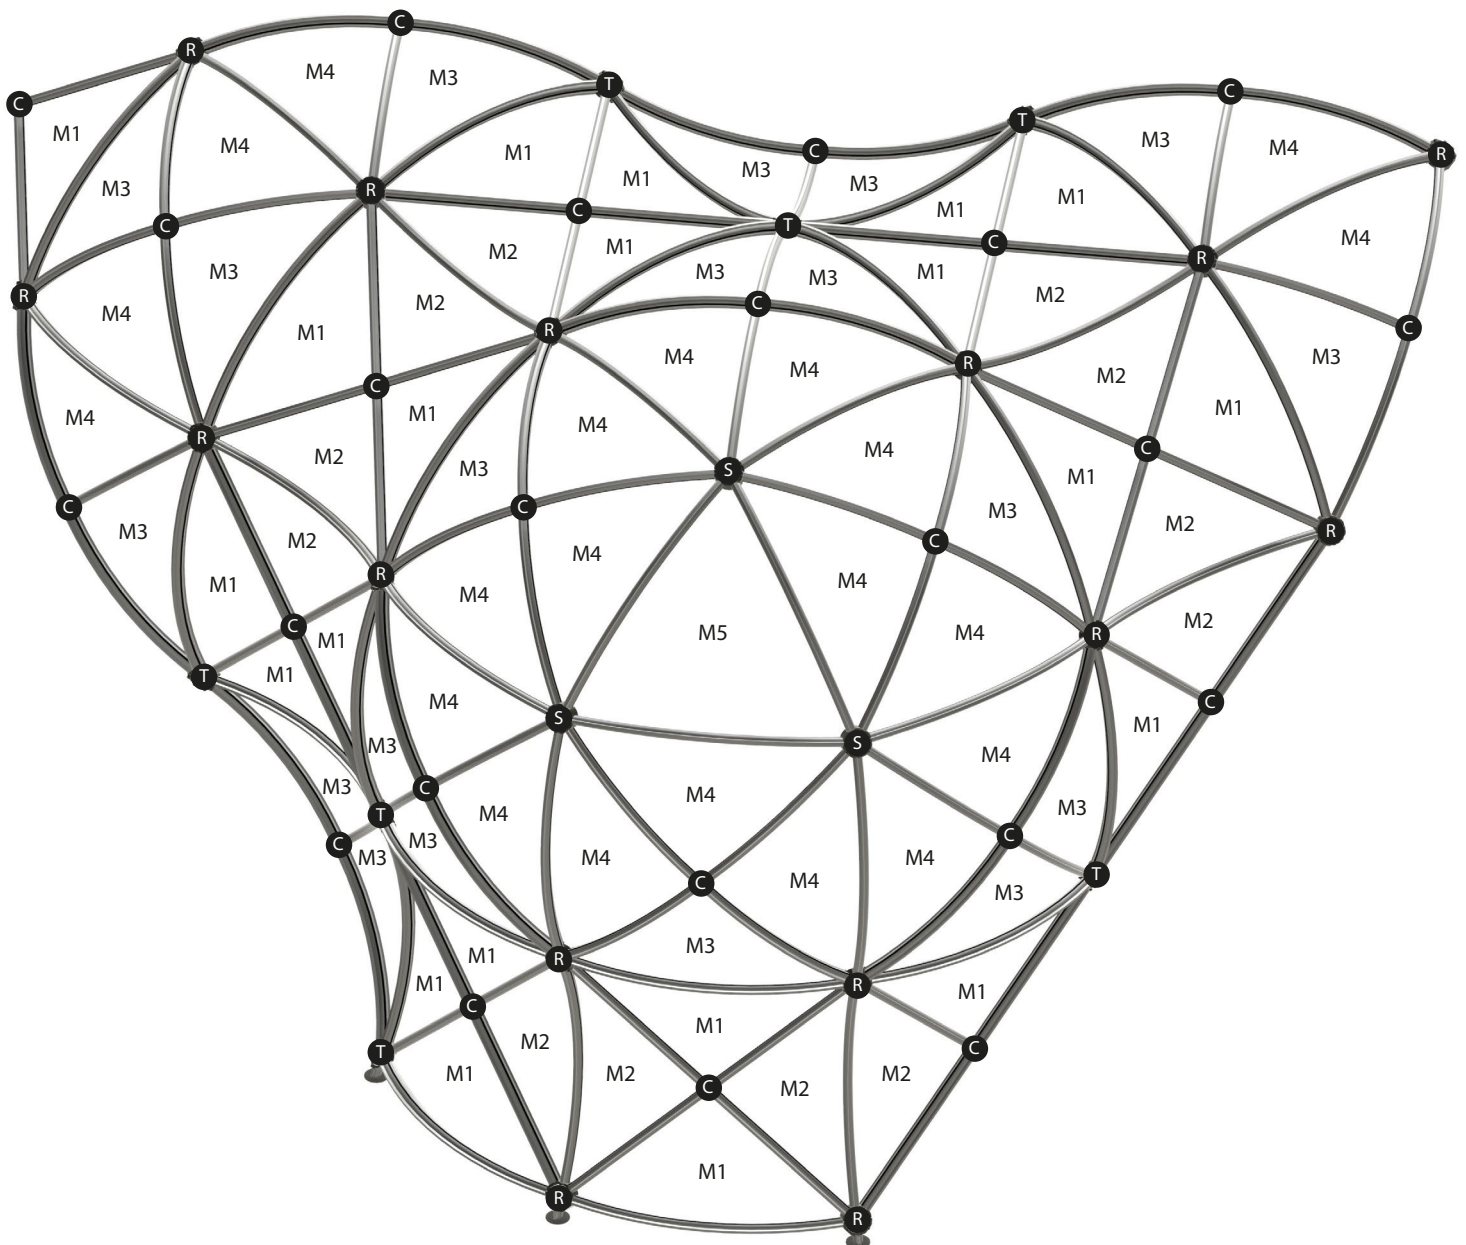


INFINITYCONST **evo**
Modular exhibition system



CATALOGUE 2022






$$B = A * 0,7071$$

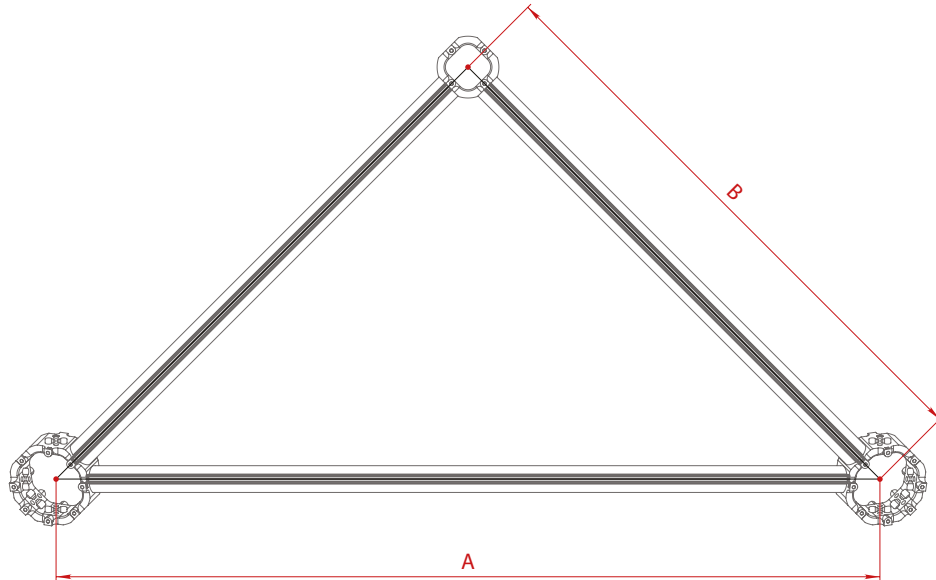


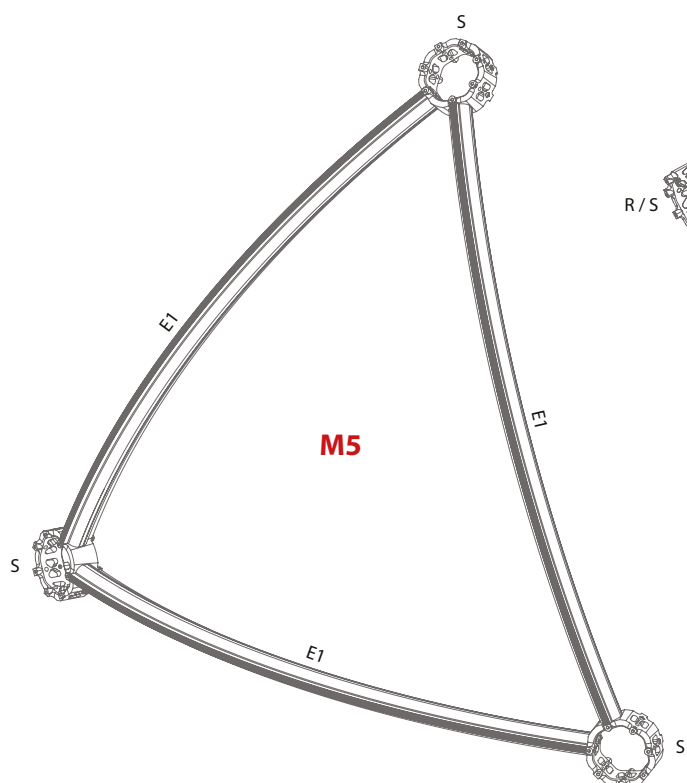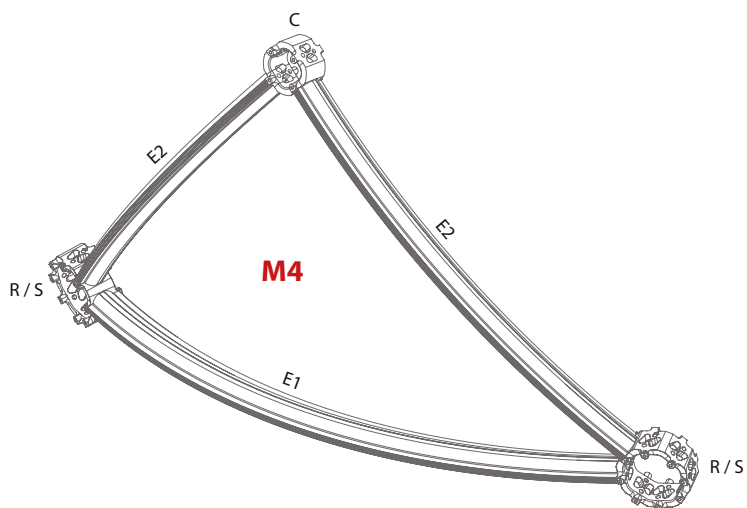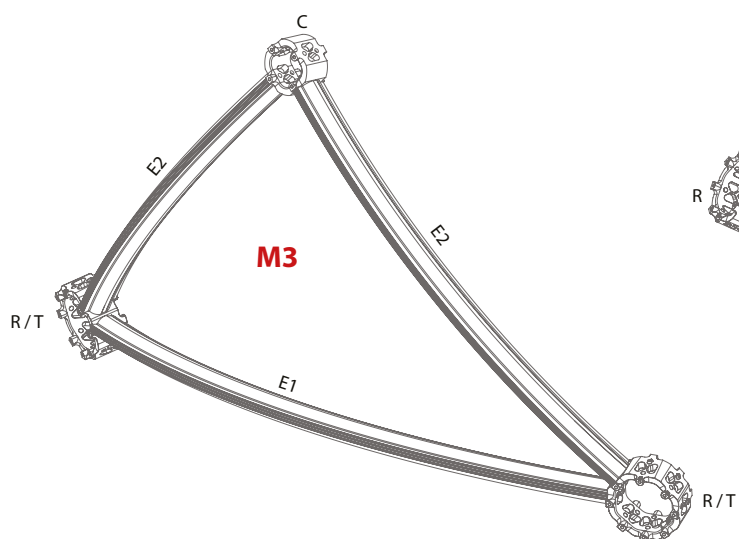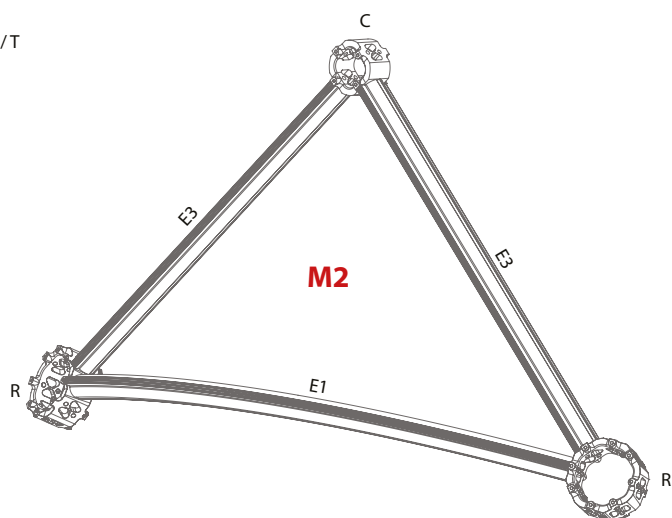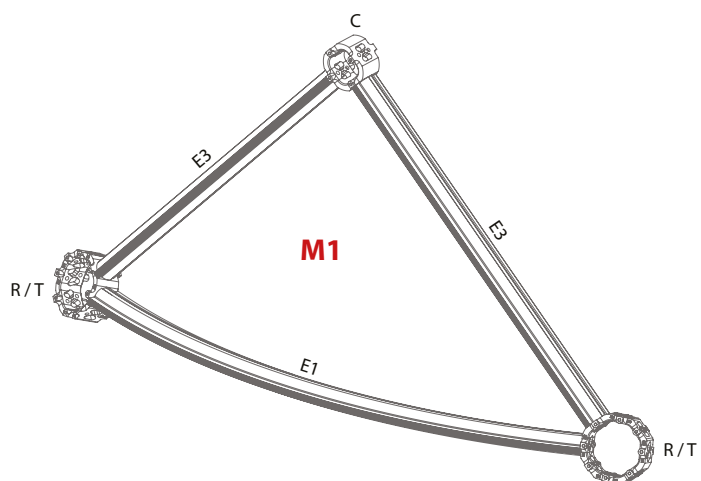

$B = A * 0,7071$

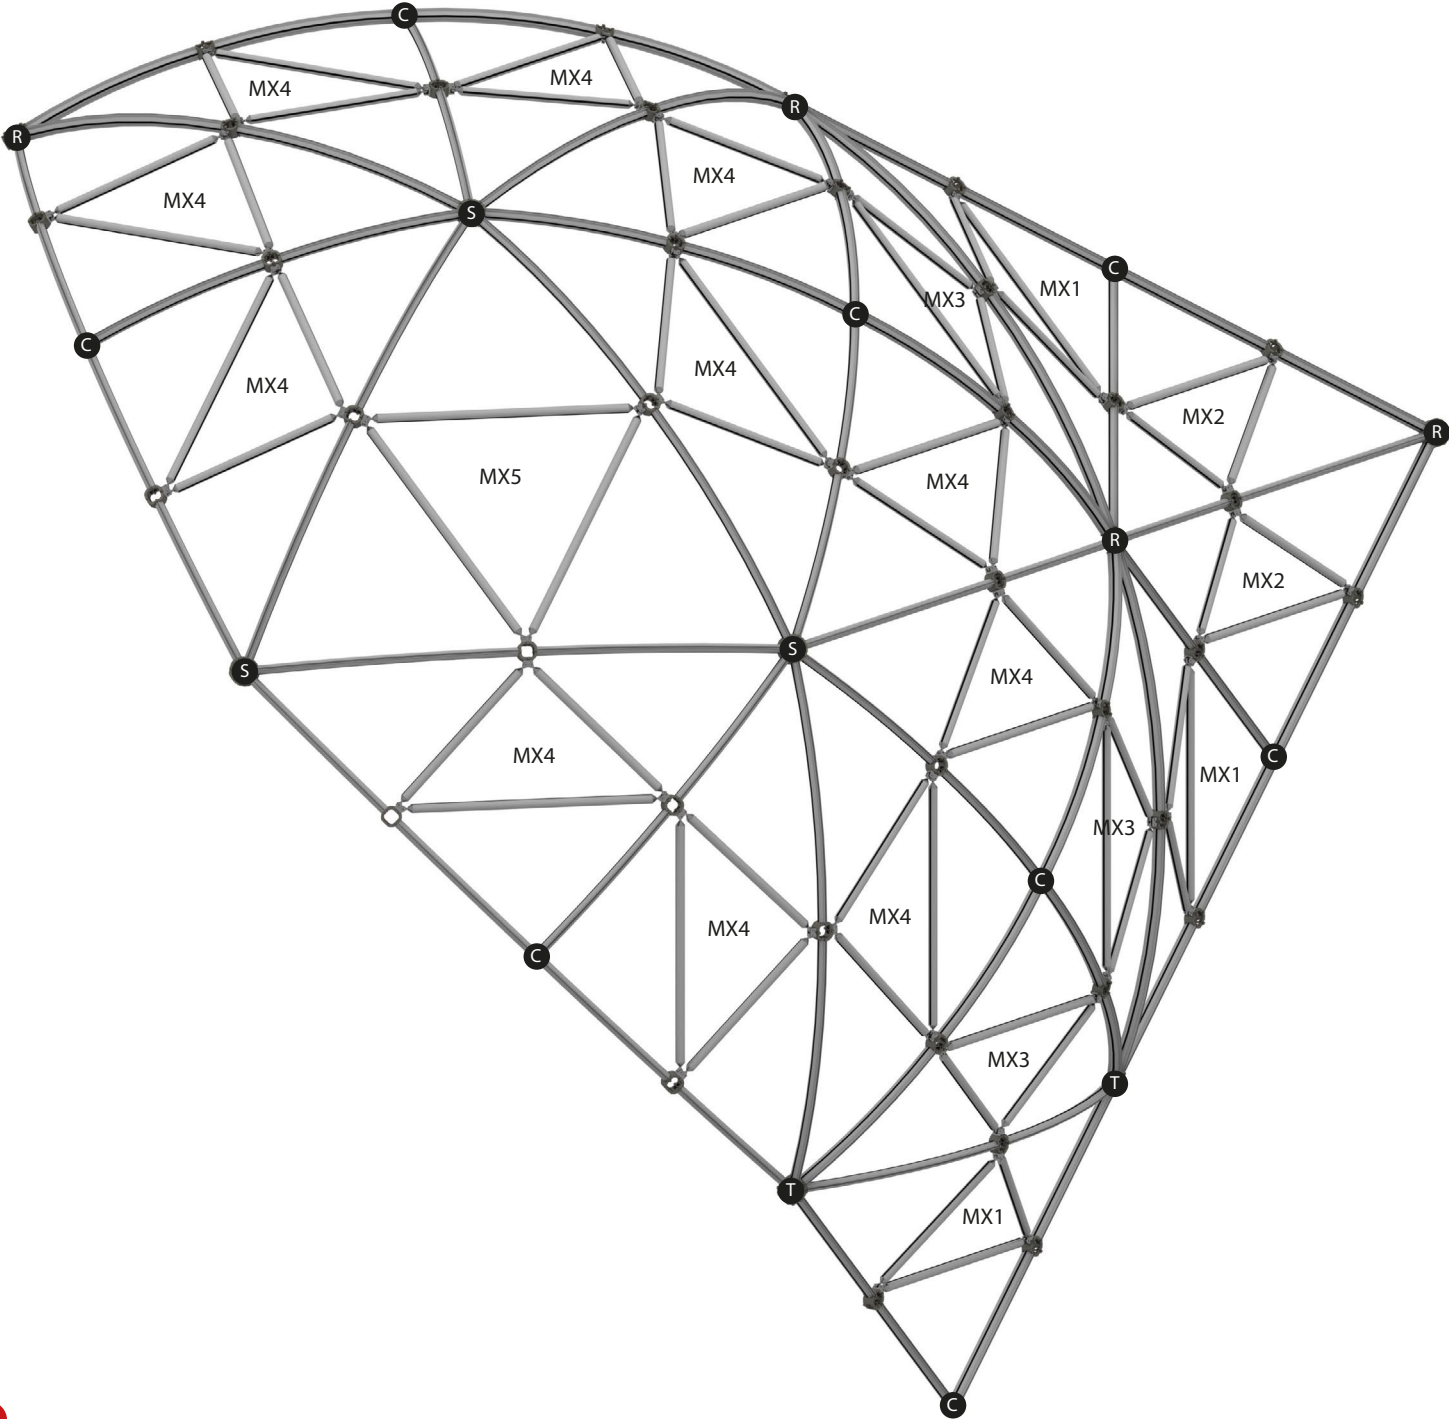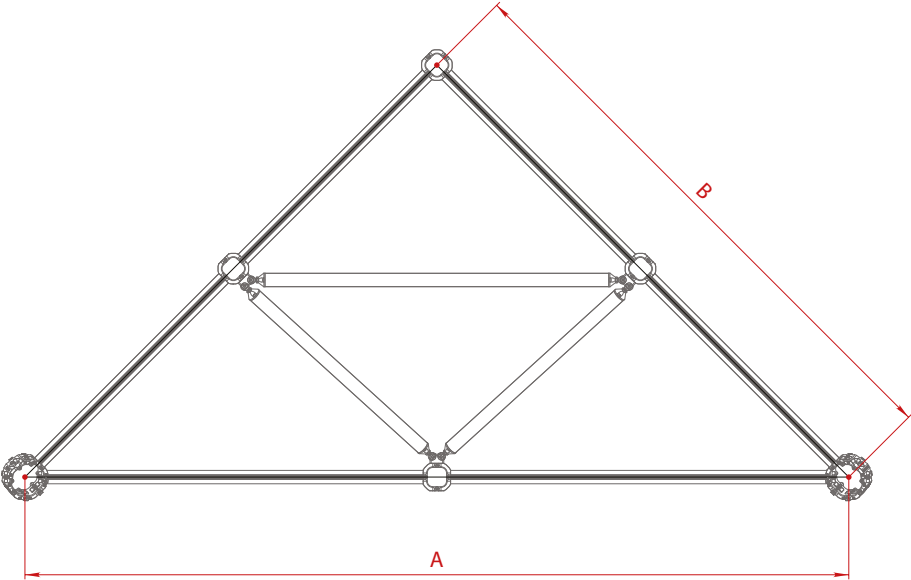

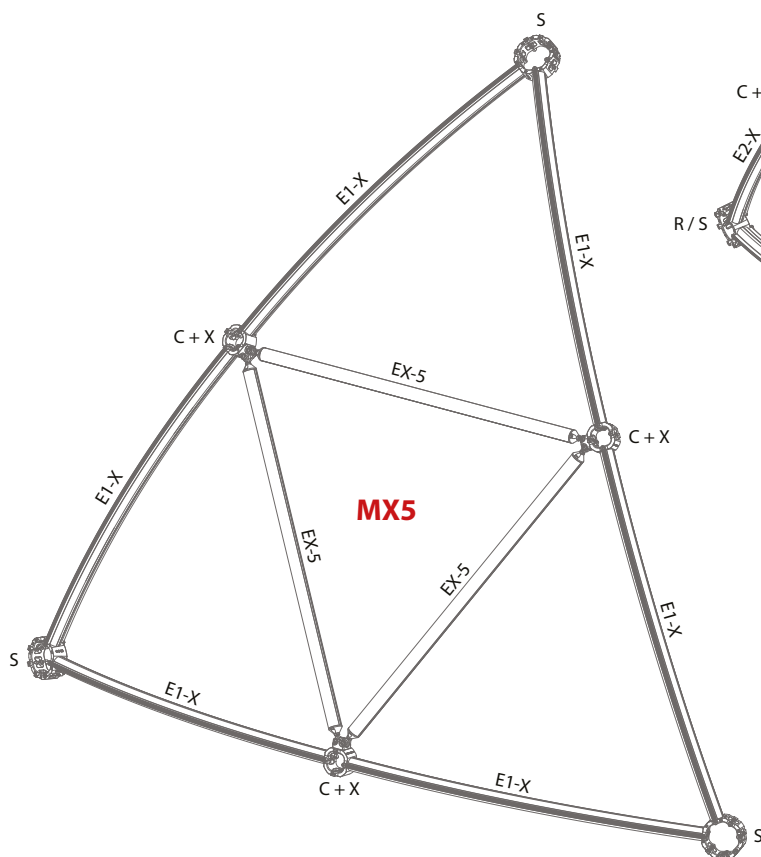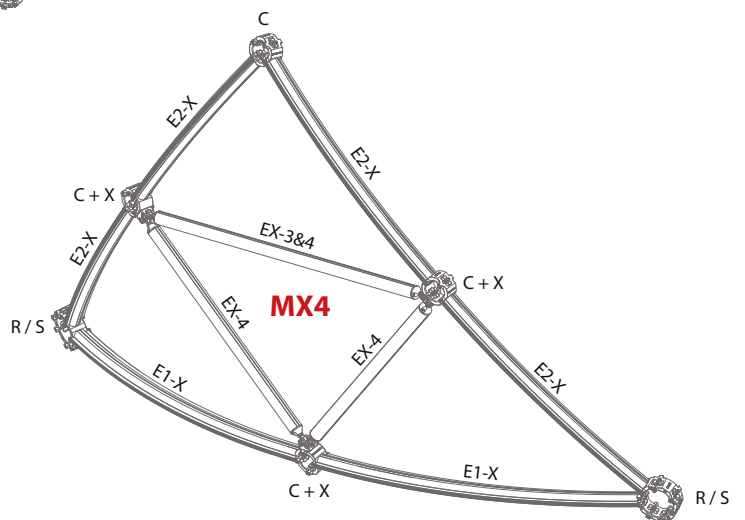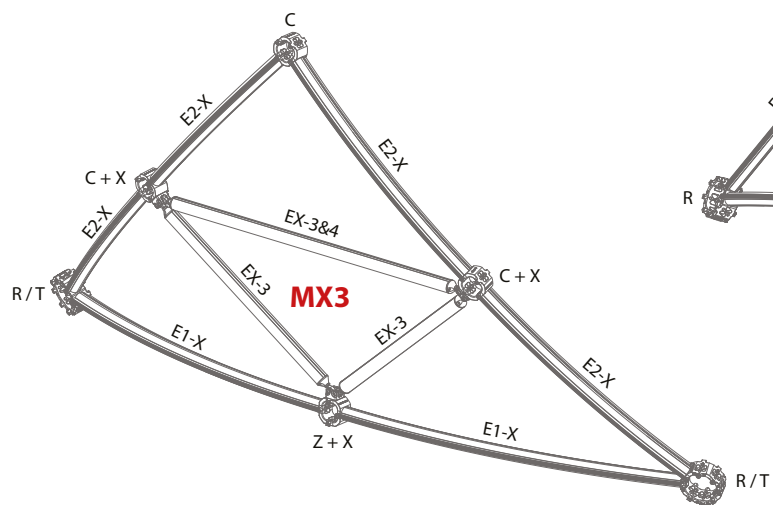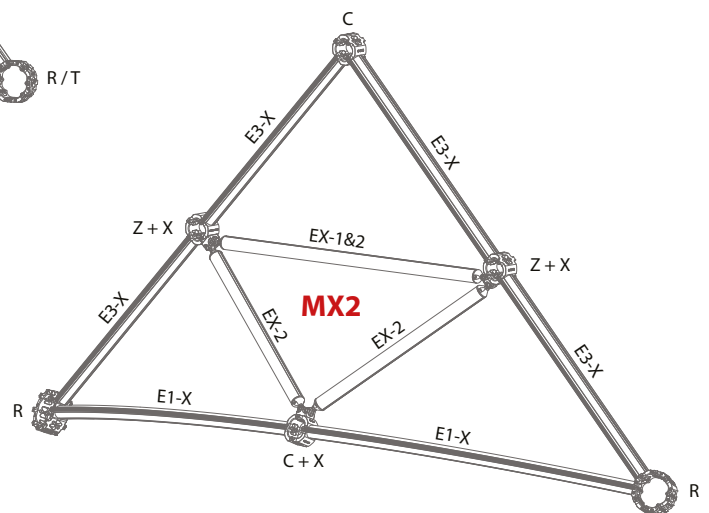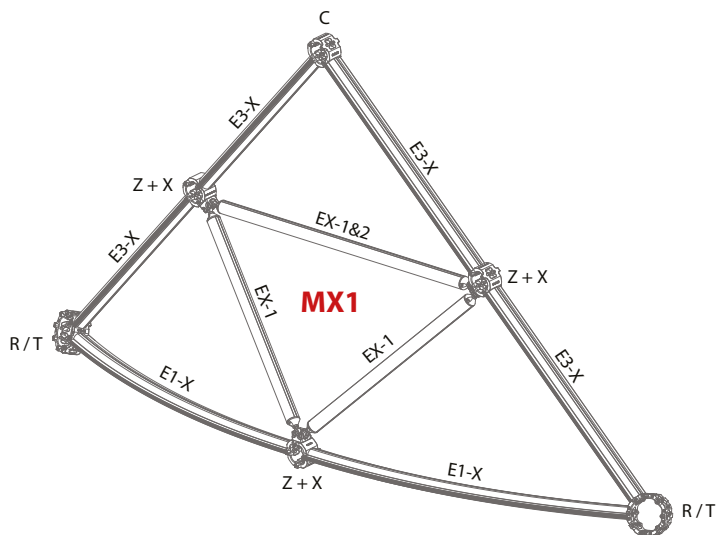

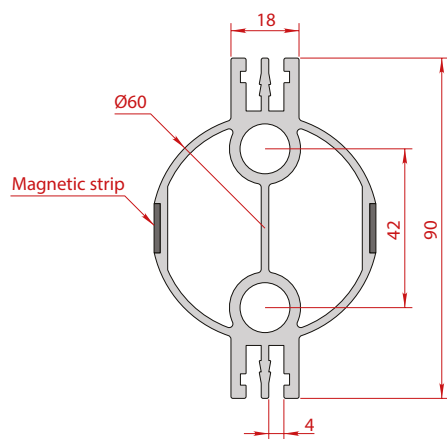


Anodized aluminium 6063-T5

Including fixing set:


4 screws ISO 7380 M10x30 10.9



E1

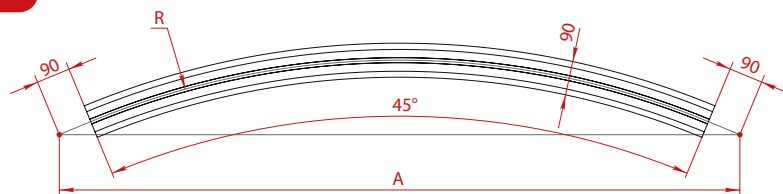


E2

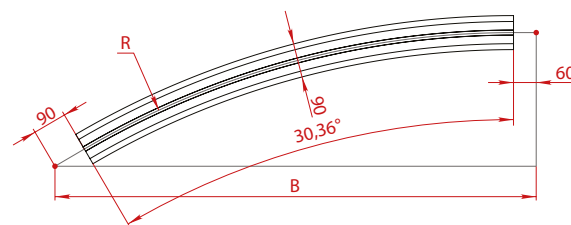


E3




E1-X

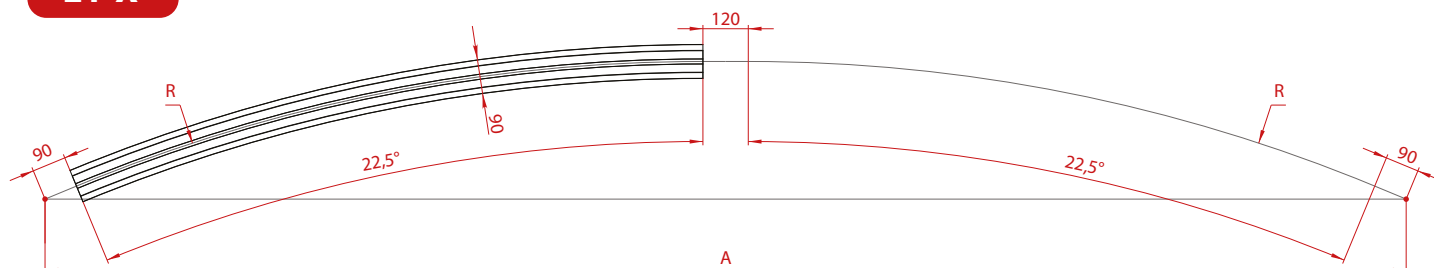

E2-X

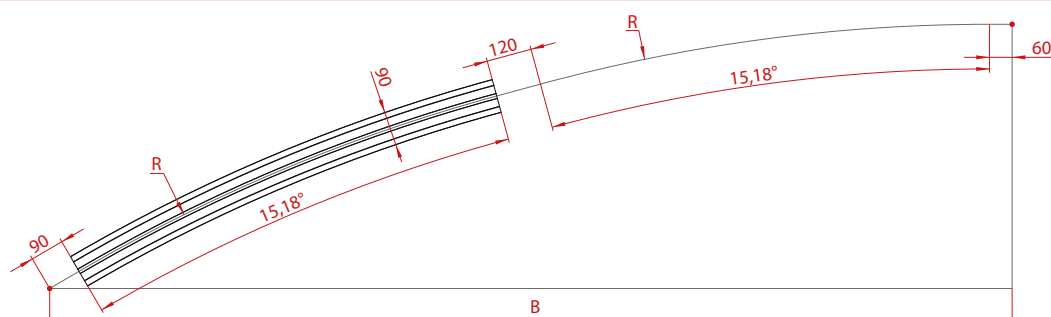

E3-X



E1-60-180 A-1800 mm R-2135 mm 4.46 kg	E1-60-240 A-2400 mm R-2918 mm 6.1 kg	E1-60-300 A-3000 mm R-3702 mm 7.73 kg	E1-60-360 A-3600 mm R-4486 mm 9.37 kg
--	---	--	--


E2-60-180 B-1273 mm R-2246 mm 3.17 kg	E2-60-240 B-1697 mm R-3085 mm 4.35 kg	E2-60-300 B-2121 mm R-3925 mm 5.53 kg	E2-60-360 B-2546 mm R-4764 mm 6.71 kg
--	--	--	--

E3-60-180 B-1273 mm L-1123 mm 2.99 kg	E3-60-240 B-1697 mm L-1547 mm 4.12 kg	E3-60-300 B-2121 mm L-1971 mm 5.24 kg	E3-60-360 B-2546 mm L-2396 mm 6.37 kg
--	--	--	--

E1-X-60-360 A-3600 mm R-4330 mm 4.64 kg	E1-X-60-480 A-4800 mm R-5897 mm 6.28 kg	E1-X-60-600 A-6000 mm R-7465 mm 7.92 kg
--	--	--

E2-X-60-360 B-2546 mm R-4535 mm 3.31 kg	E2-X-60-480 B-3394 mm R-6214 mm 4.5 kg	E2-X-60-600 B-4242 mm R-7892 mm 5.68 kg
--	---	--

E3-X-60-360 B-2546 mm L-1138 mm 3.15 kg	E3-X-60-480 B-3394 mm L-1562 mm 4.27 kg	E3-X-60-600 B-4242 mm L-1986 mm 5.4 kg
--	--	---

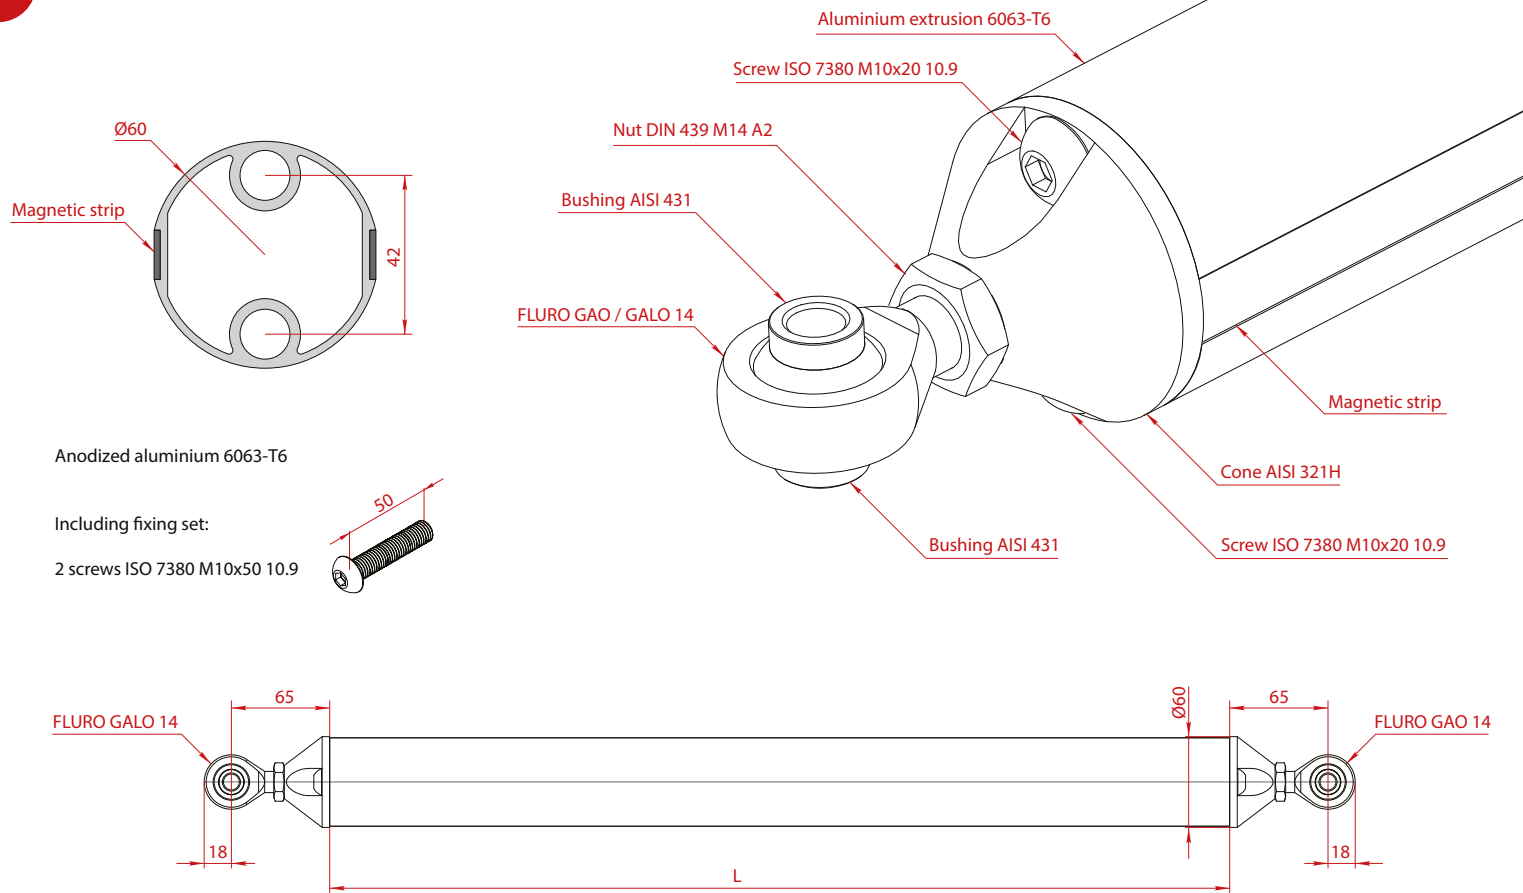

evoX 360

evoX 480

evoX600

EX-1&2

For module MX1 & MX2

EX-1&2-60-360

L-1501 mm
3.65 kg

EX-1&2-60-480

L-2101 mm
4.65 kg

EX-1&2-60-600

L-2701 mm
5.65 kg

evoX 360

evoX 480

evoX600

EX-1

For module MX1

EX-1-60-360

L-1028 mm
2.89 kg

EX-1-60-480

L-1469 mm
3.62 kg

EX-1-60-600

L-1909 mm
4.36 kg

evoX 360

evoX 480

evoX600

EX-2

For module MX2

EX-2-60-360

L-935 mm
2.72 kg

EX-2-60-480

L-1343 mm
3.4 kg

EX-2-60-600

L-1751 mm
4.08 kg

EX-3&4

For module MX3 & MX4

EX-3&4-60-360L-1564 mm
3.77 kg**EX-3&4-60-480**L-2186 mm
4.8 kg**EX-3&4-60-600**L-2808 mm
5.84 kg

evoX 360

evoX 480

evoX600

EX-3

For module MX3

EX-3-60-360L-992 mm
2.81 kg**EX-3-60-480**L-1419 mm
3.53 kg**EX-3-60-600**L-1847 mm
4.24 kg

evoX 360

evoX 480

evoX600

EX-4

For module MX4

EX-4-60-360L-1090 mm
2.98 kg**EX-4-60-480**L-1551 mm
3.74 kg**EX-4-60-600**L-2012 mm
4.51 kg

evoX 360

evoX 480





evoX600

EX-5

For module MX5

EX-5-60-360L-1640 mm
3.89 kg**EX-5-60-480**L-2286 mm
4.97 kg**EX-5-60-600**L-2931 mm
6.05 kg



Aluminium Extrusion for Keder

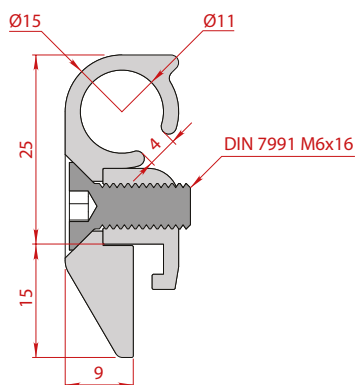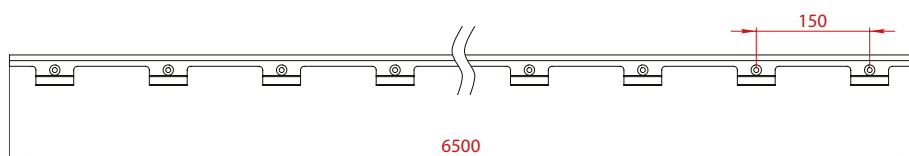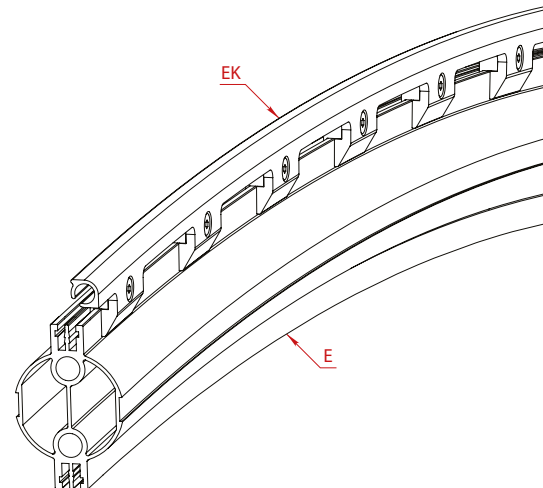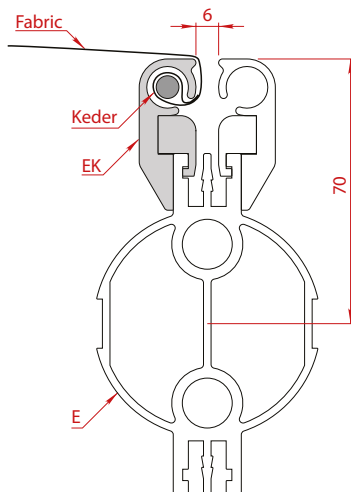EK**EK-650**Anodized aluminium 6063-T6
3.2 kg

C-R

**C-R-60**

Stainless steel AISI 321H
4.15 kg

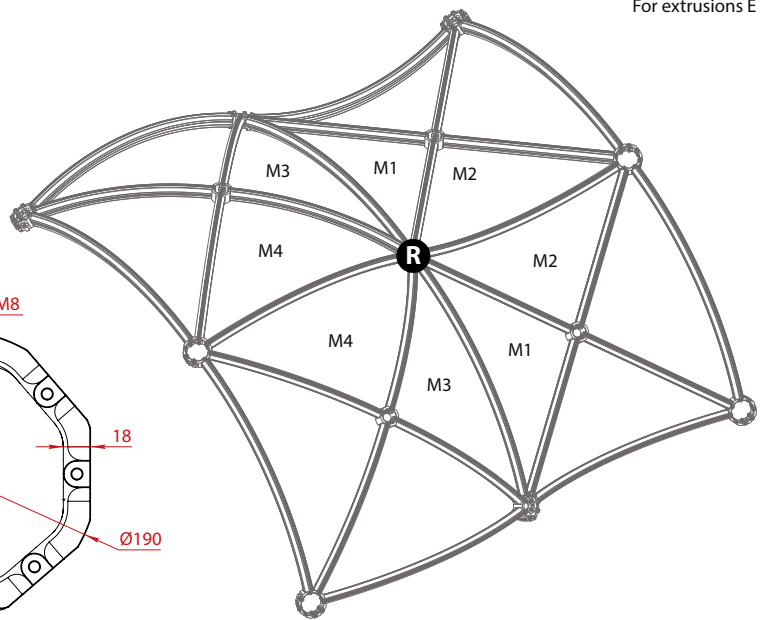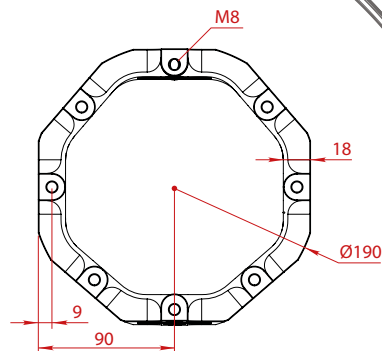



Connector Translation

For extrusions E

C-T

**C-T-60**

Stainless steel AISI 321H
4.15 kg

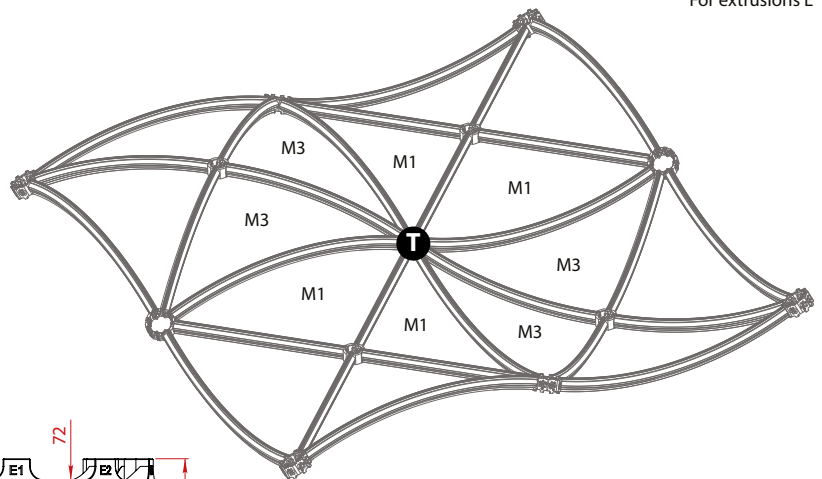


Connector Sphere

For extrusions E

C-S

**C-S-60**

Stainless steel AISI 321H
4.31 kg



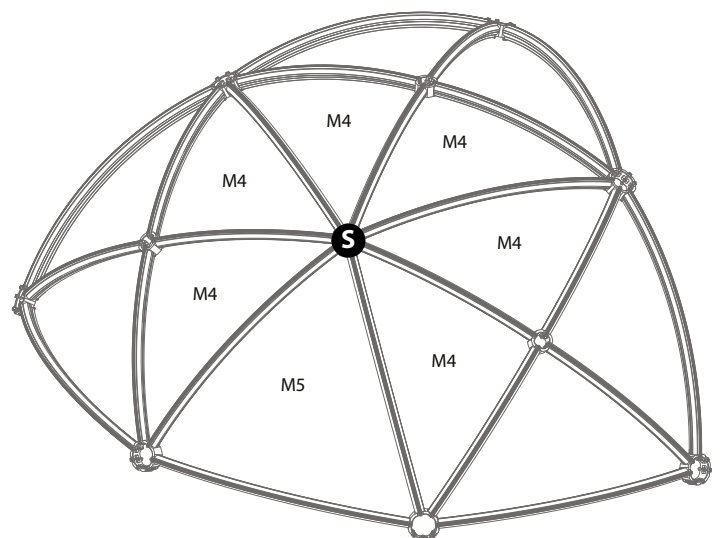


C-C



C-C-60


Stainless steel AISI 321H
3.01 kg

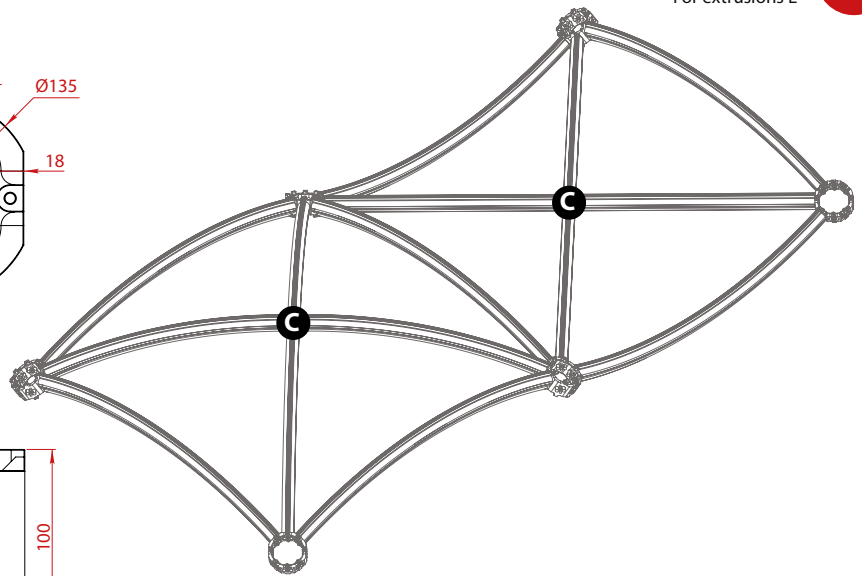

Connector X

For extrusions EX and connector C or Z

C-X






C-X-60

Stainless steel AISI 321H
0.64 kg

Including fixing set:

2 screws ISO 7380 M10x30 10.9

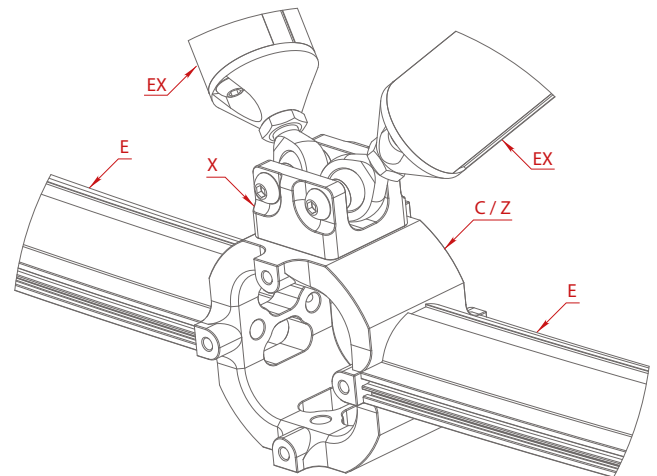




Connector Z

For modules MX1, MX2, MX3

C-Z

C-Z-60

Stainless steel AISI 321H
3.01 kg



Connector Foot

For connectors R, T, S



CF1

CF1-60

Stainless steel AISI 304 and anodized aluminium 6063-T5
1.58 kg

Including fixing set:

2 screws ISO 7380 M10x30 10.9

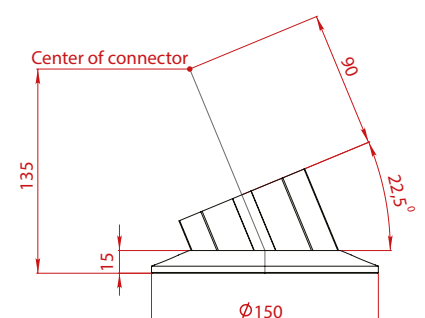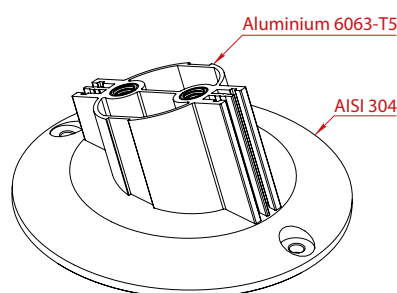



CC2-RTS

CC2-RTS-60

Coated steel RAL 9016 and plastic
1.0 kg

Including fixing set:

2 screws DIN 912 M8x16 8.8

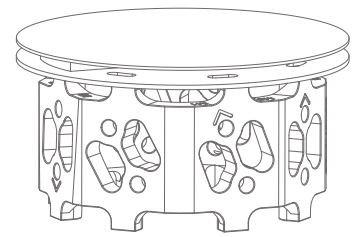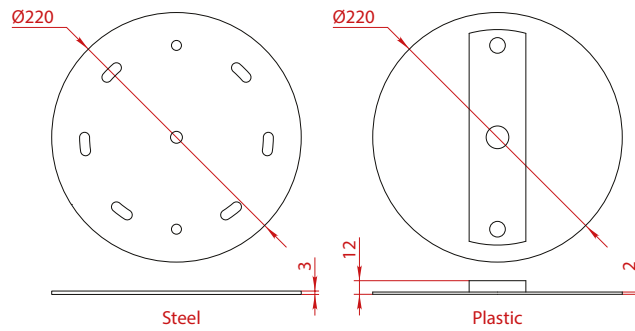

Cover for Connector **C**



CC2-C

CC2-C-60

Coated steel RAL 9016 and plastic
0.56 kg

Including fixing set:

2 screws DIN 912 M8x16 8.8

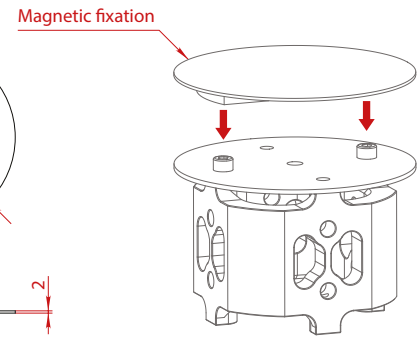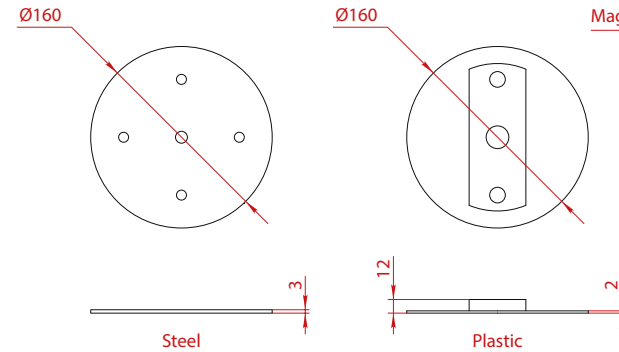

Cover for Connectors **R & T**

CC4-RT



CC4-RT-60

Coated steel RAL 9016 and neoprene
1.0 kg

Including fixing set:

4 screws DIN 912 M8x20 8.8

4 washers with EPDM 8,4x16 A2

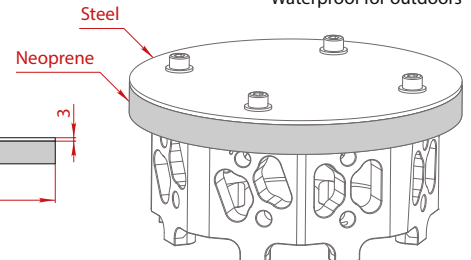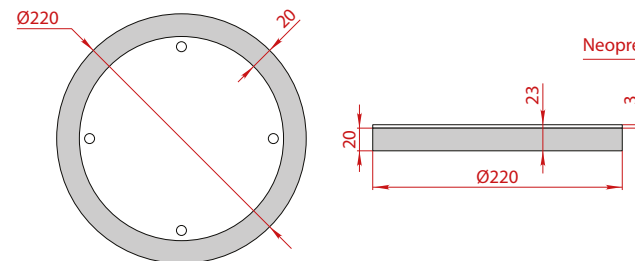

Cover for Connector **S**

CC4-S



CC4-S-60

Coated steel RAL 9016 and neoprene
1.0 kg

Including fixing set:

4 screws DIN 912 M8x20 8.8

4 washers with EPDM 8,4x16 A2

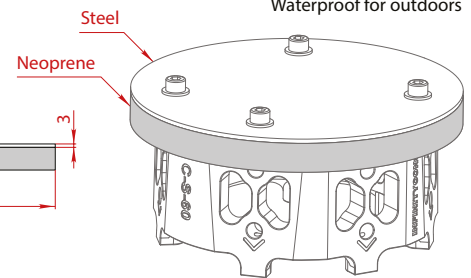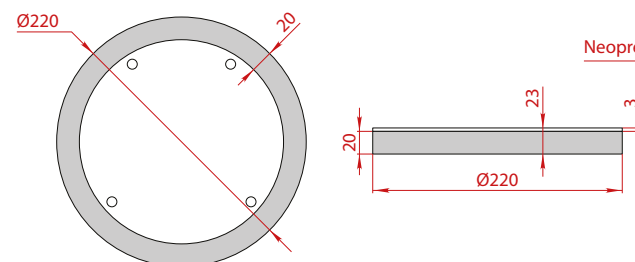

Cover for Connector **C**

CC4-C



CC4-C-60


Coated steel RAL 9016 and neoprene
0.56 kg

Including fixing set:

4 screws DIN 912 M8x20 8.8

4 washers with EPDM 8,4x16 A2

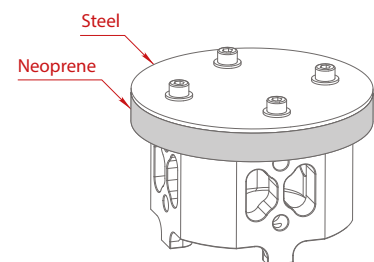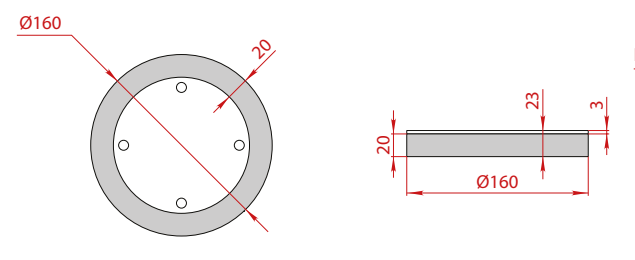


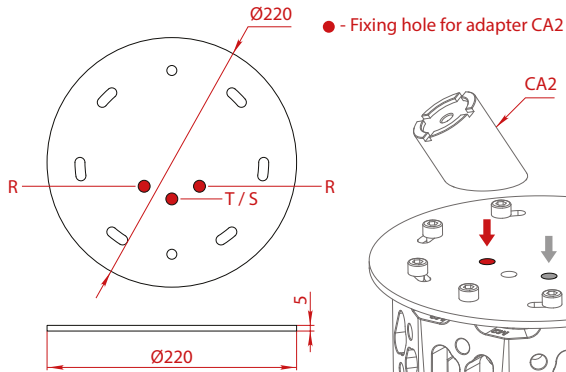CC5-RTS**CC5-RTS-60**


Coated steel RAL 9016
1.53 kg

Including fixing set:

8 screws DIN 912 M8x16 8.8

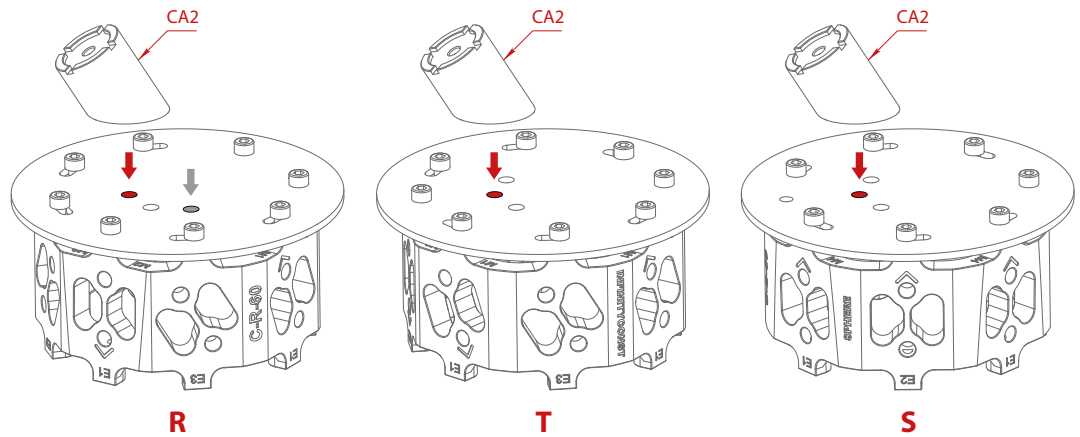**Connector Adapter**


For integration with Burkhardt Leither PILA system

CA2**CA2-60**



Stainless steel AISI 304
0.76 kg

Including fixing set:


2 screws ISO 7380 M10x20 10.9

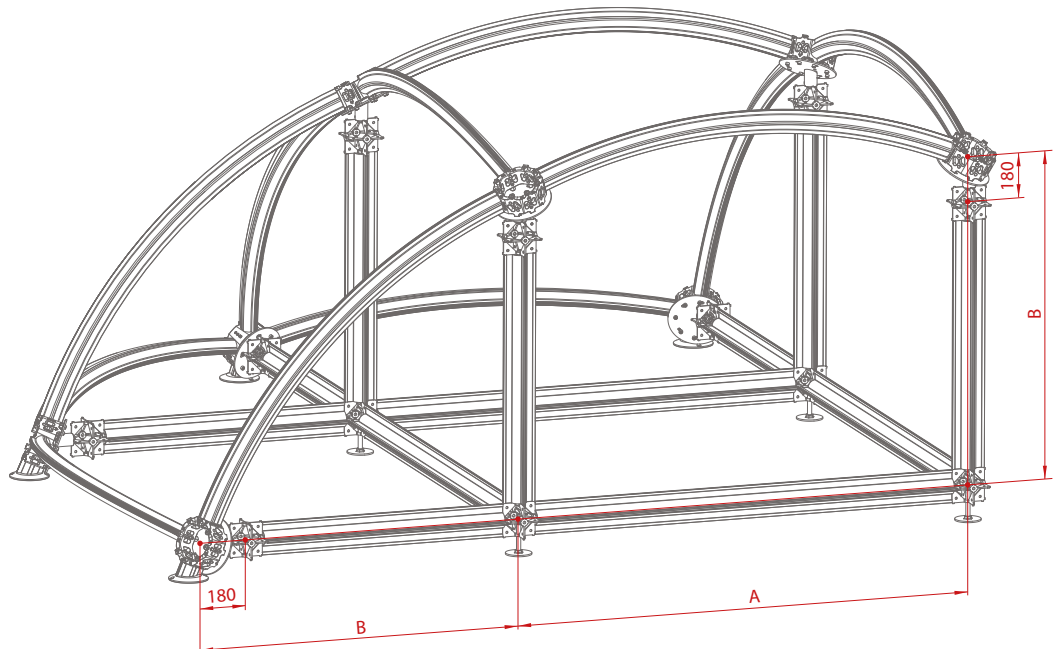

$$B = A * 0,7071$$

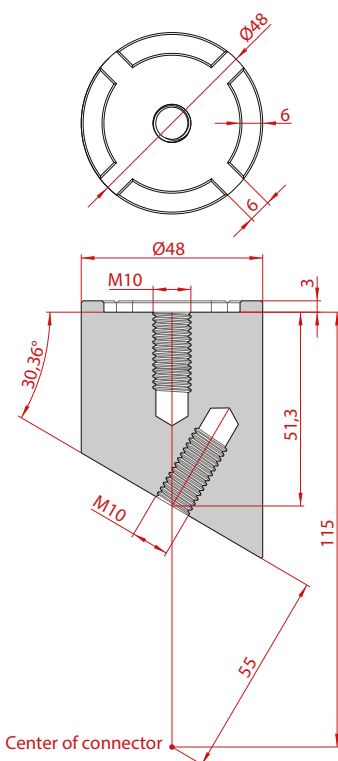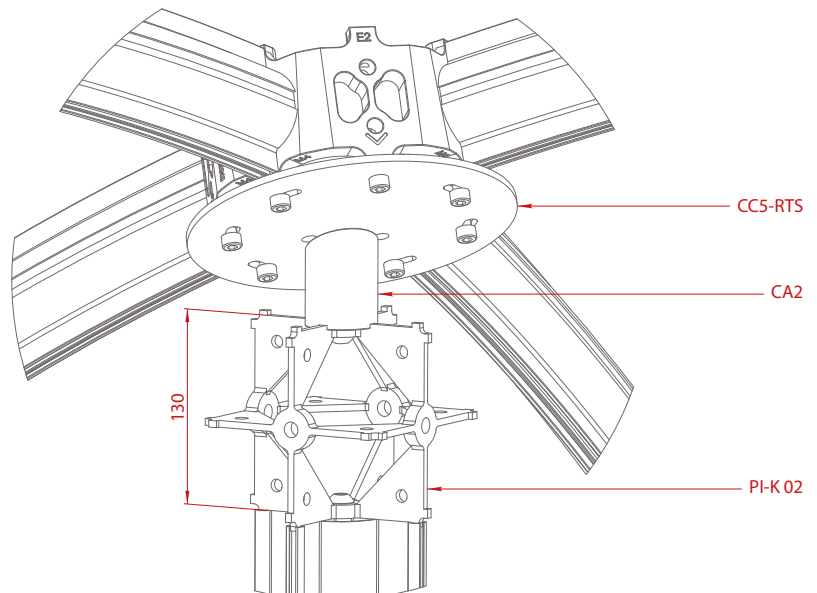


SE-C

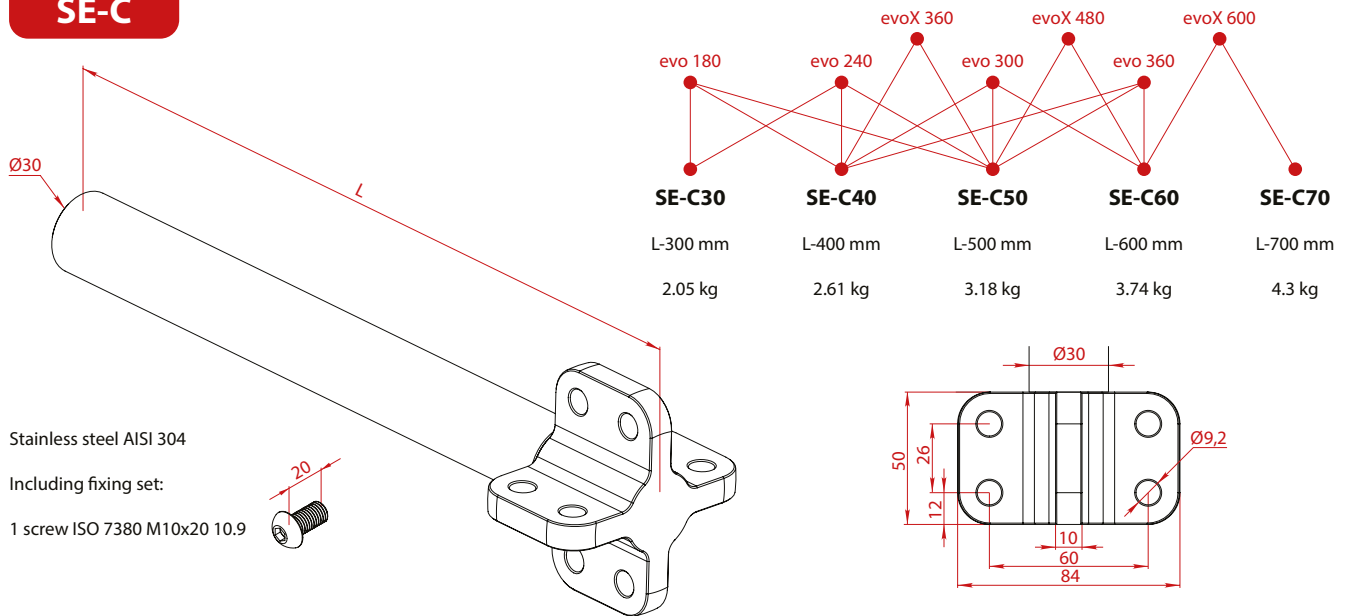

Static Element - Console Base

SE-CB1

SE-CB1
Stainless steel AISI 304
0.74 kg

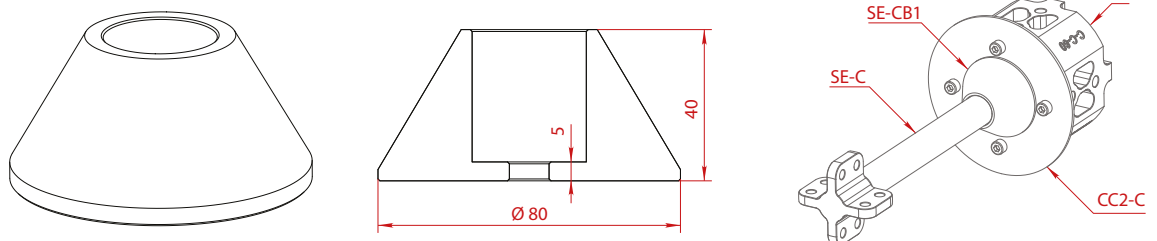


Static Element - Brace Connector

SE-BC1

SE-BC1
Stainless steel AISI 304
0.05 kg

Including fixing set:

1 screw DIN 912 M8x30 12.9

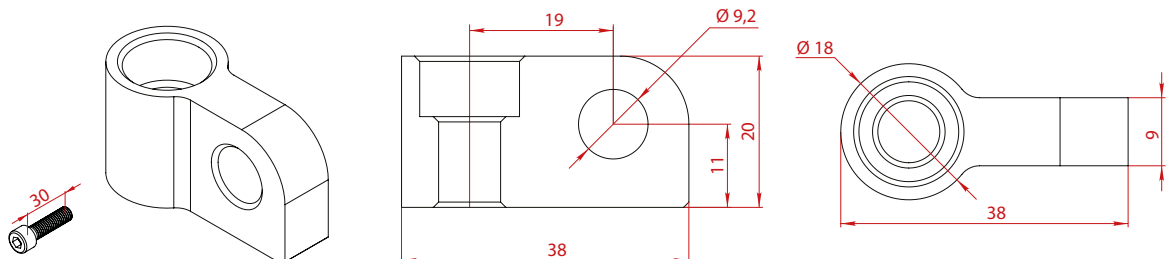

Static Element - Brace 1


SE-B1

Stainless steel AISI 316

Including fixing set:

2 brace connectors SE-BC1

2 screws DIN 912 M8x30 12.9

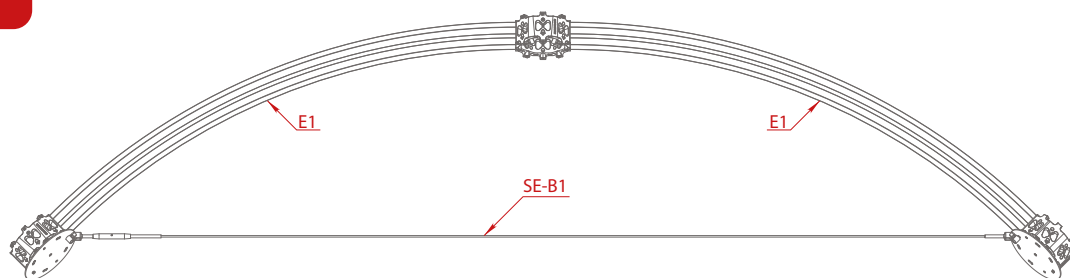

A-180 cm

A-240 cm

A-300 cm

A-360 cm

A-480 cm

A-600 cm

SE-B1-180

SE-B1-240

SE-B1-300

SE-B1-360

SE-B1-480

SE-B1-600

L-2952 mm

L-4061 mm

L-5170 mm

L-6278 mm

L-8496 mm

L-10713 mm

0.83 kg


0.97 kg

1.1 kg


1.23 kg

1.5 kg

1.76 kg

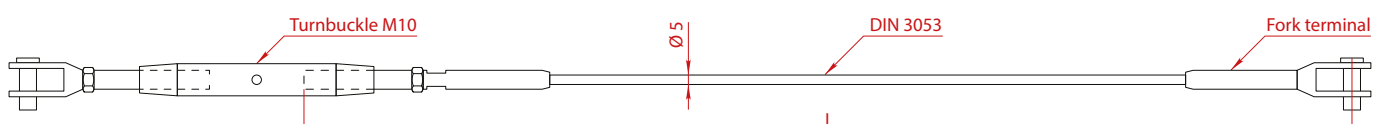

SE-B2

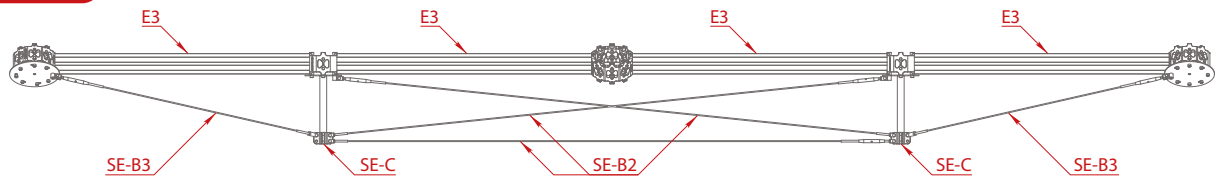


Stainless steel AISI 316

Including fixing set:

1 brace connector SE-BC1

1 screw DIN 912 M8x30 12.9



A-180 cm

SE-B2-180

L-2332 mm

0.68 kg

A-240 cm

SE-B2-240

L-3178 mm

0.78 kg

A-300 cm

SE-B2-300

L-4029 mm


0.88 kg

A-360 cm

SE-B2-360


L-4871 mm

0.98 kg



Static Element - Brace 3

SE-B3

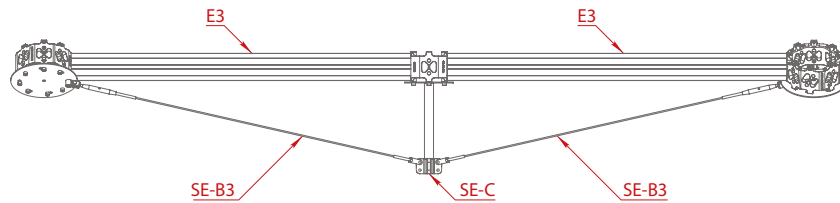


Stainless steel AISI 316

Including fixing set:

1 brace connector SE-BC1

1 screw DIN 912 M8x30 12.9



A-180 cm

SE-B3-180

L-1061 mm

0.57 kg

A-240 cm

SE-B3-240

L-1472 mm

0.62 kg

A-300 cm

SE-B3-300

L-1907 mm

0.67 kg

A-360 cm

SE-B3-360

L-2332 mm

0.72 kg

A-480 cm

SE-B3-480

L-3186 mm


0.82 kg

A-600 cm

SE-B3-600


L-4040 mm

0.93 kg



Static Element - Brace 4

SE-B4

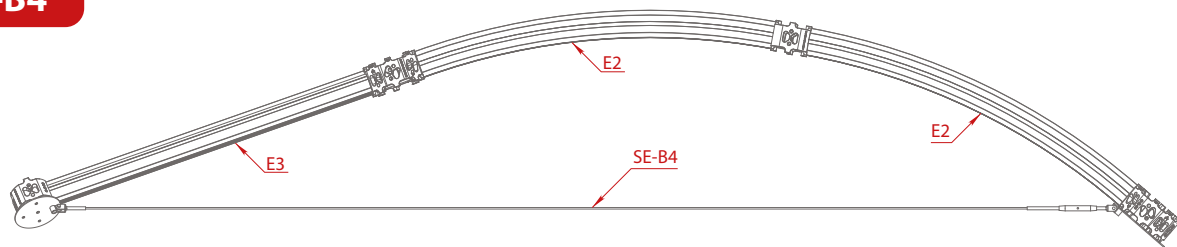


Stainless steel AISI 316

Including fixing set:

2 brace connectors SE-BC1

2 screws DIN 912 M8x30 12.9



A-180 cm

SE-B4-180

L-3341 mm

0.90 kg

A-240 cm

SE-B4-240

L-4572 mm

1.04 kg

A-300 cm

SE-B4-300

L-5802 mm

1.18 kg

A-360 cm

SE-B4-360

L-7033 mm

1.31 kg

A-480 cm

SE-B4-480

L-9494 mm


1.62 kg

A-600 cm

SE-B4-600

L-11956 mm

1.92 kg





SE-BX1

Stainless steel AISI 316

Including fixing set:

1 brace connector SE-BC1

1 screw DIN 912 M8x30 12.9

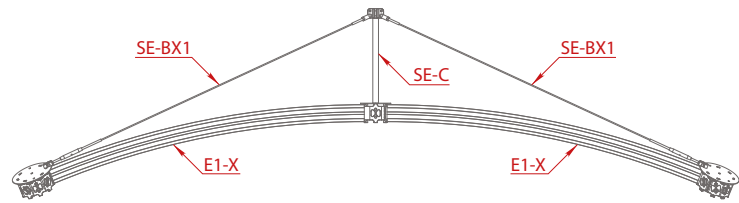

evoX 360

SE-BX1-360

L-1706 mm

0.65 kg

evoX 480

SE-BX1-480

L-2344 mm


0.72 kg

evoX 600

SE-BX1-600

L-2982 mm

0.8 kg



Static Element - Brace evoX 2



SE-BX2

Stainless steel AISI 316

Including fixing set:

1 brace connector SE-BC1

1 screw DIN 912 M8x30 12.9

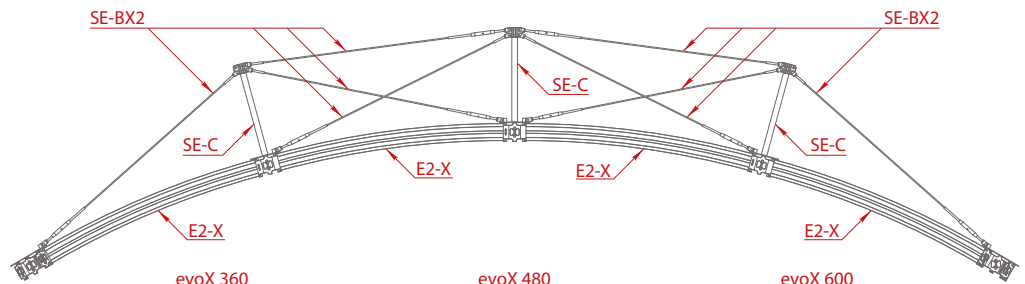

evoX 360

SE-BX2-360

L-1217 mm

0.54 kg

evoX 480

SE-BX2-480

L-1685 mm


0.6 kg

evoX 600

SE-BX2-600

L-2154 mm

0.66 kg



Static Element - Brace evoX 3



SE-BX3

Stainless steel AISI 316

Including fixing set:

1 brace connector SE-BC1

1 screw DIN 912 M8x30 12.9

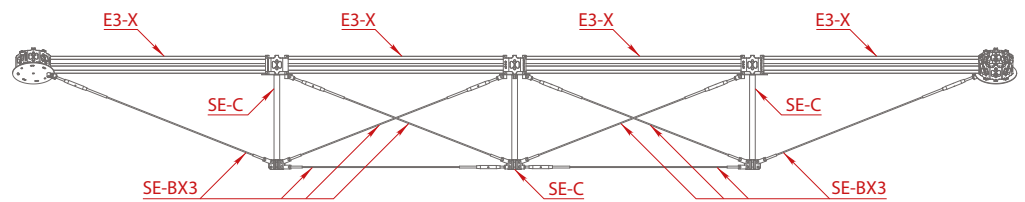

evoX 360

SE-BX3-360

L-1076 mm

0.57 kg

evoX 480

SE-BX3-480

L-1504 mm


0.62 kg

evoX 600


SE-BX3-600

L-1933 mm

0.67 kg



SE-BX4

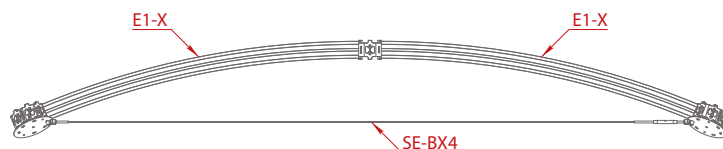


Stainless steel AISI 316

Including fixing set:

2 brace connectors SE-BC1

2 screws DIN 912 M8x30 12.9



evoX 360

SE-BX4-360

L-3222 mm

0.87 kg

evoX 480

SE-BX4-480

L-4422 mm


1.01 kg

evoX 600

SE-BX4-600


L-5622 mm

1.15 kg



Static Element - **Brace evoX 5**

SE-BX5

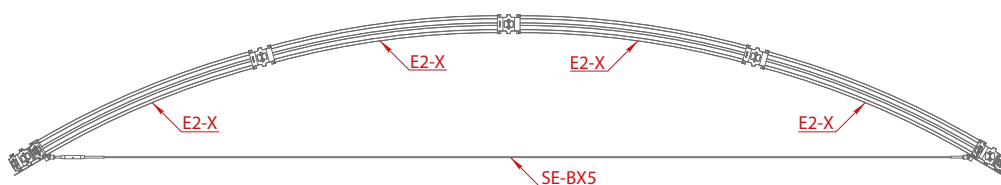


Stainless steel AISI 316

Including fixing set:

2 brace connectors SE-BC1

2 screws DIN 912 M8x30 12.9



evoX 360

SE-BX5-360

L-4708 mm

1.04 kg

evoX 480

SE-BX5-480

L-6405 mm



1.25 kg

evoX 600

SE-BX5-600

L-8102 mm

1.45 kg

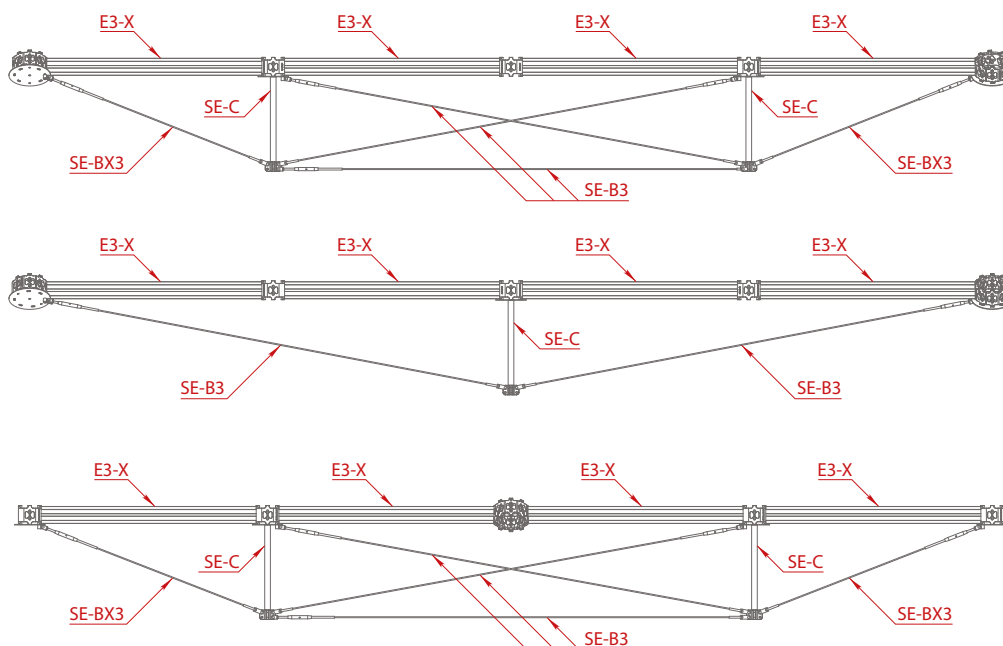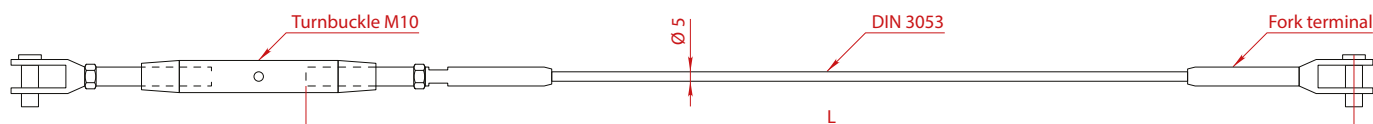


Fabric for Modules 1, 2, 3, 4

Trevira CS Stretch fabric with silicone strip
B1 by DIN 4102

For indoor

F1-4

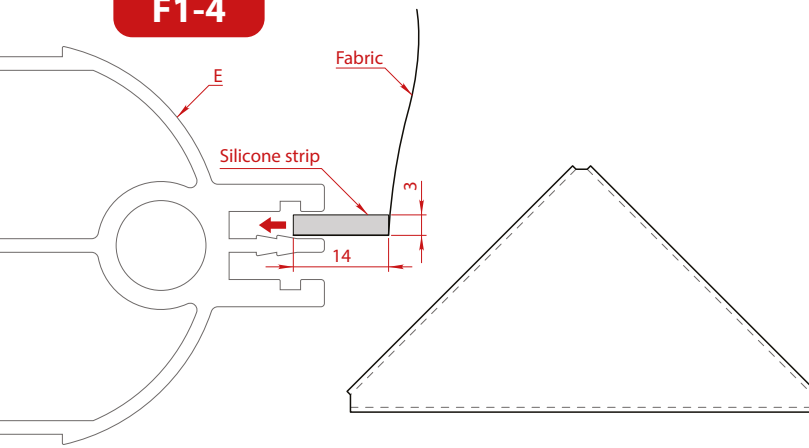

evo 180

F1-4-180

0.29 kg

evo 240

F1-4-240

0.44 kg

evo 300

F1-4-300

0.61 kg

evo 360

F1-4-360

0.8 kg

evoX 360

F1-4-X-360

0.78 kg

evoX 480

F1-4-X-480

1.22 kg

evoX 600

F1-4-X-600


1.75 kg

Fabric for Module 5

Trevira CS Stretch fabric with silicone strip
B1 by DIN 4102

For indoor

F5

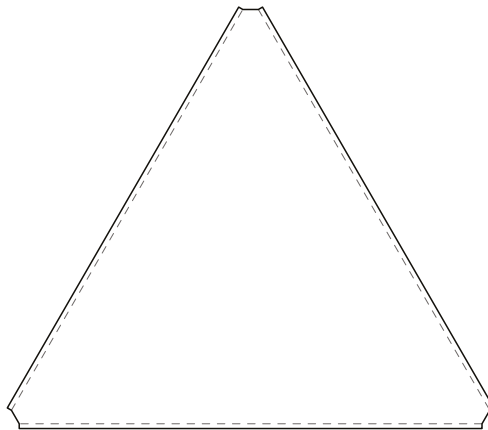

evo 180

F5-180

0.41 kg

evo 240

F5-240

0.63 kg

evo 300

F5-300

0.89 kg

evo 360

F5-360

1.18 kg

evoX 360

F5-X-360

1.17 kg

evoX 480

F5-X-480

1.87 kg

evoX 600

F5-X-600


2.71 kg

Fabric with Hole for Modules 1, 2, 3, 4

Trevira CS Stretch double-sided fabric with silicone strip
B1 by DIN 4102

For indoor

FH1-4

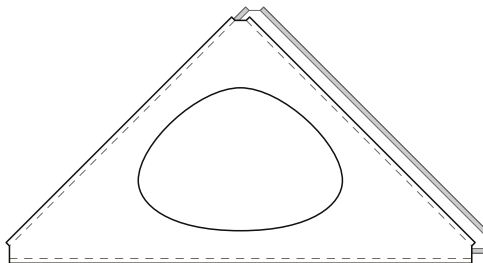

evo 180

FH1-4-180

0.54 kg

evo 240

FH1-4-240

0.8 kg

evo 300

FH1-4-300

1.09 kg

evo 360

FH1-4-360


1.41 kg

Fabric with Hole for Module 5

Trevira CS Stretch double-sided fabric with silicone strip
B1 by DIN 4102

For indoor

FH5

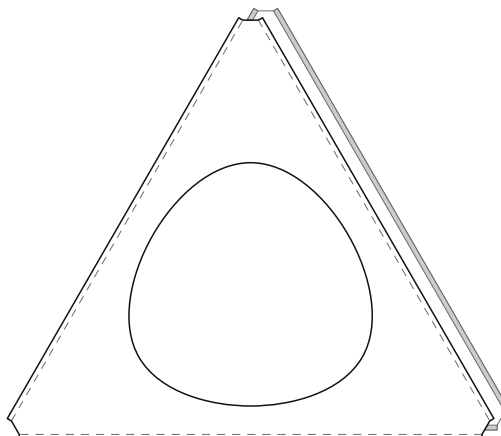

evo 180

FH5-180

0.71 kg

evo 240

FH5-240

1.07 kg

evo 300

FH5-300


1.47 kg

evo 360

FH5-360

1.93 kg


F mix

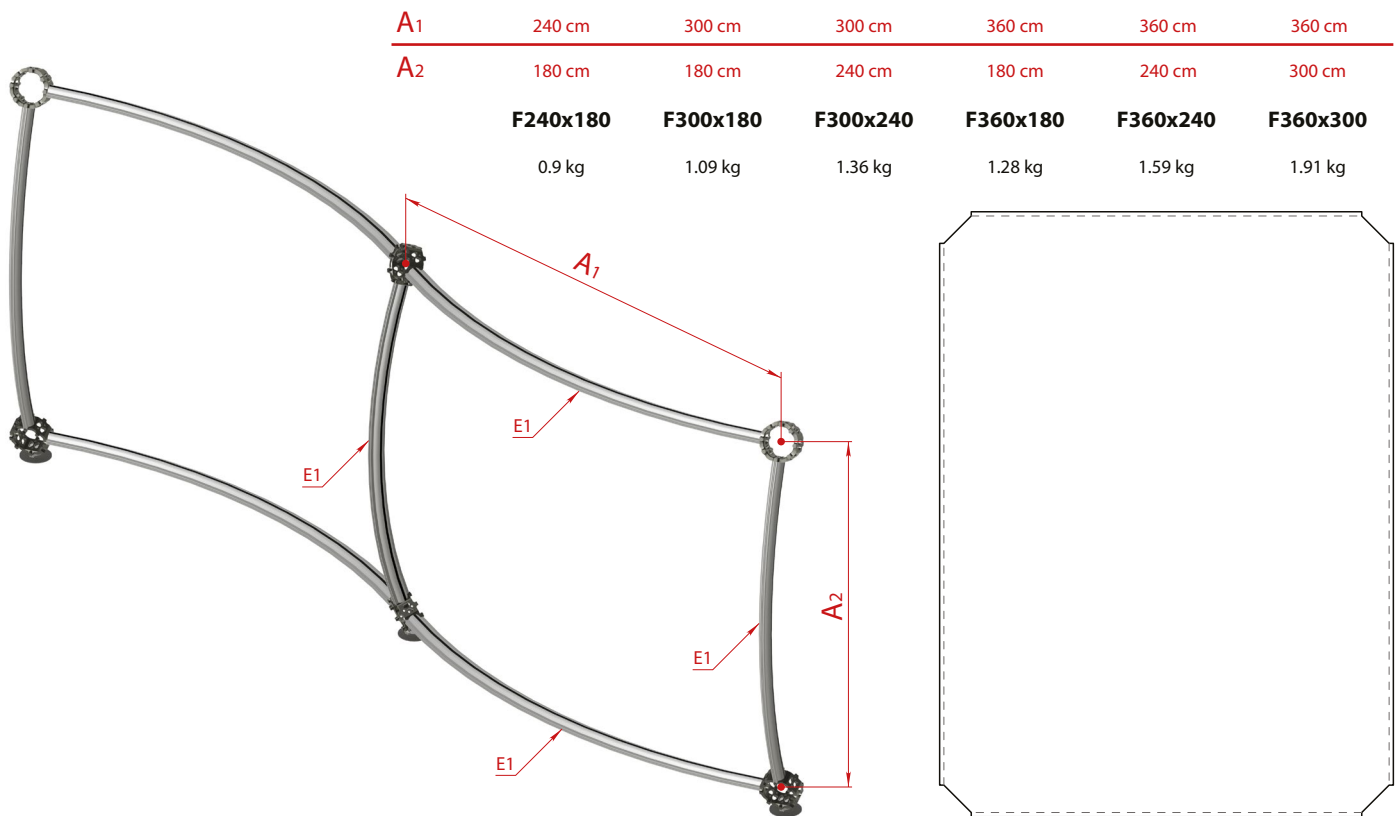

Fabric extra fixation strip PVC


For outdoors

F-PVC



F-PVC

PVC strip
1 x 7,5 mm x 200 m
2.4 kg

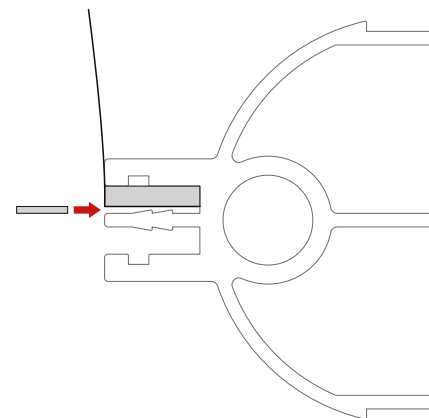

Fabric waterproofing tape 3M


For outdoors

F-3M



F-3M

3M™ Extreme Sealing Tape 4411N
1 x 18 mm x 33 m
0.5 kg

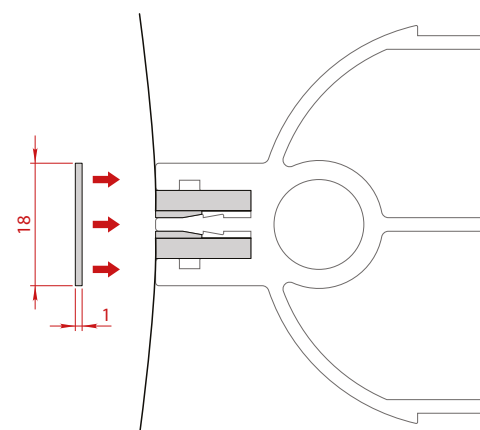

Fabric for Module 1 - OUT side

F1-OUT

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F1-OUT-180

F1-OUT-240

F1-OUT-300

F1-OUT-360



For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

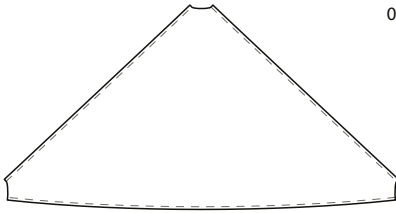

evoX 360

evoX 480

evoX 600

F1-OUT-X-360

F1-OUT-X-480

F1-OUT-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 2 - OUT side

F2-OUT

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F2-OUT-180

F2-OUT-240

F2-OUT-300

F2-OUT-360


For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

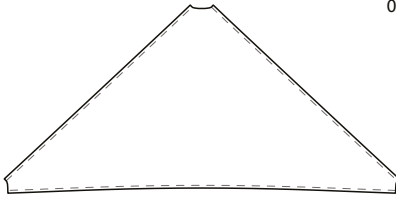

evoX 360

evoX 480

evoX 600

F2-OUT-X-360

F2-OUT-X-480

F2-OUT-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 3 - OUT side

F3-OUT

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F3-OUT-180

F3-OUT-240

F3-OUT-300

F3-OUT-360


For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

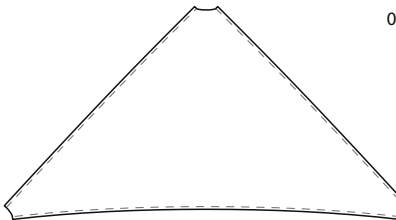

evoX 360

evoX 480

evoX 600

F3-OUT-X-360

F3-OUT-X-480

F3-OUT-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 4 - OUT side

F4-OUT

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F4-OUT-180

F4-OUT-240

F4-OUT-300

F4-OUT-360


For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

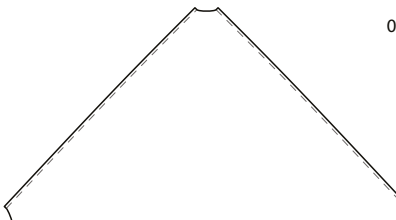

evoX 360

evoX 480

evoX 600

F4-OUT-X-360

F4-OUT-X-480

F4-OUT-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 5 - OUT side

F5-OUT

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F5-OUT-180

F5-OUT-240

F5-OUT-300

F5-OUT-360


For indoor & outdoors

0.52 kg

0.82 kg

1.19 kg

1.62 kg

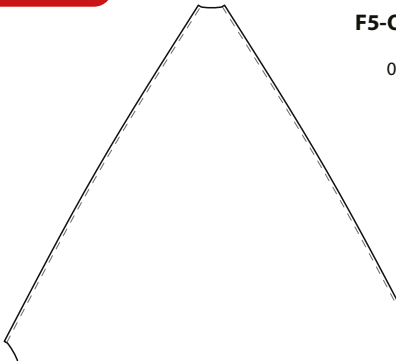

evoX 360

evoX 480

evoX 600

F5-OUT-X-360

F5-OUT-X-480

F5-OUT-X-600

1.6 kg

2.64 kg

3.91 kg

Fabric for Module 1 - IN side

F1-IN

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F1-IN-180

F1-IN-240

F1-IN-300

F1-IN-360



For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

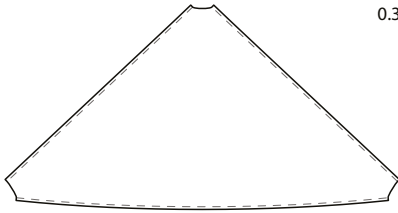

evoX 360

evoX 480

evoX 600

F1-IN-X-360

F1-IN-X-480

F1-IN-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 2 - IN side

F2-IN

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F2-IN-180

F2-IN-240

F2-IN-300

F2-IN-360


For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

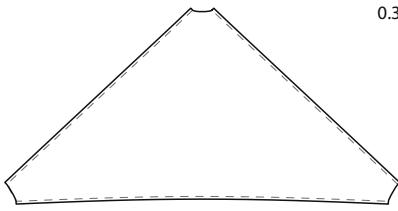

evoX 360

evoX 480

evoX 600

F2-IN-X-360

F2-IN-X-480

F2-IN-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 3 - IN side

F3-IN

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F3-IN-180

F3-IN-240

F3-IN-300

F3-IN-360


For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

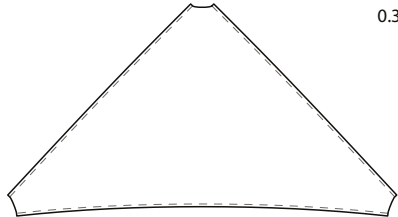

evoX 360

evoX 480

evoX 600

F3-IN-X-360

F3-IN-X-480

F3-IN-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 4 - IN side

F4-IN

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F4-IN-180

F4-IN-240

F4-IN-300

F4-IN-360


For indoor & outdoors

0.35 kg

0.55 kg

0.78 kg

1.04 kg

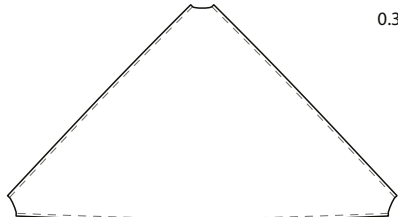

evoX 360

evoX 480

evoX 600

F4-IN-X-360

F4-IN-X-480

F4-IN-X-600

1.03 kg

1.67 kg

2.44 kg

Fabric for Module 5 - IN side

F5-IN

evo 180

evo 240

evo 300

evo 360

SAMBA fabric with silicone strip
B1 by DIN 4102

F5-IN-180

F5-IN-240

F5-IN-300

F5-IN-360


For indoor & outdoors

0.52 kg

0.82 kg

1.19 kg

1.62 kg

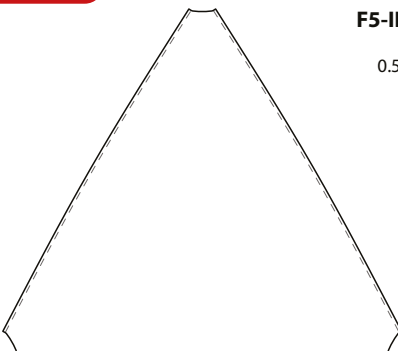

evoX 360

evoX 480

evoX 600

F5-IN-X-360


F5-IN-X-480

F5-IN-X-600



1.6 kg

2.64 kg


3.91 kg

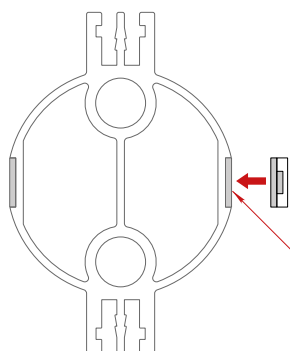

evo 180	evo 240	evo 300	evo 360
evoX 360	evoX 480	evoX 600	
L1-24-180	L1-24-240	L1-24-300	L1-24-360
L - 1500 mm	L - 2166 mm	L - 2833 mm	L - 3333 mm
0.19 kg	0.27 kg	0.35 kg	0.41 kg

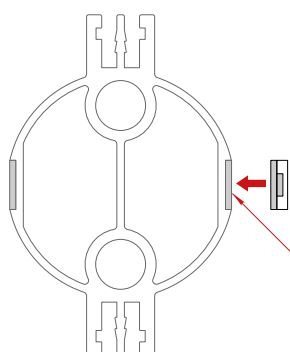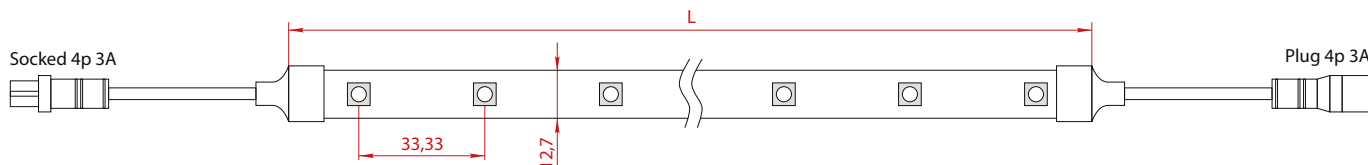

evo 180	evo 240	evo 300	evo 360
evoX 360	evoX 480	evoX 600	
L2-24-180	L2-24-240	L2-24-300	L2-24-360
L - 1000 mm	L - 1500 mm	L - 1833 mm	L - 2333 mm
0.12 kg	0.19 kg	0.23 kg	0.29 kg

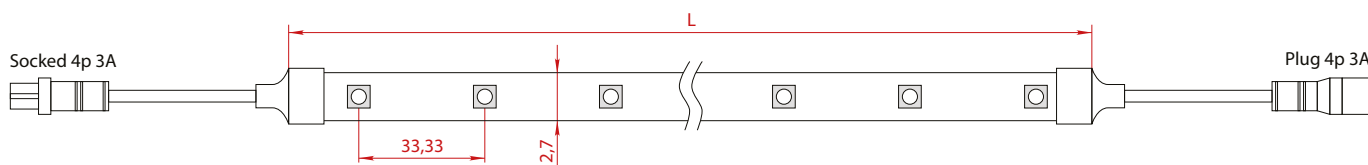

L3-1500-24

430 x 260 x 140 mm



11.6 kg

Including:

1 connector NAC32S.W ENSTO


1 XLR3 DMX terminator

1 XLR3-XLR3 cable L-500mm

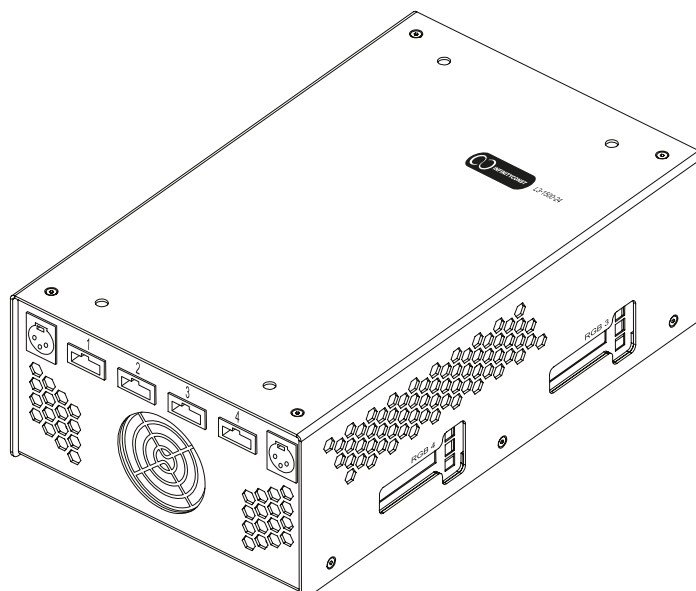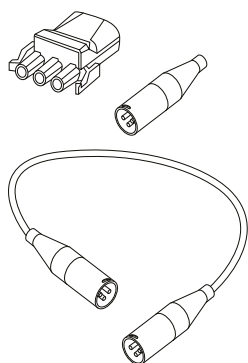

LS-8

0.06 kg

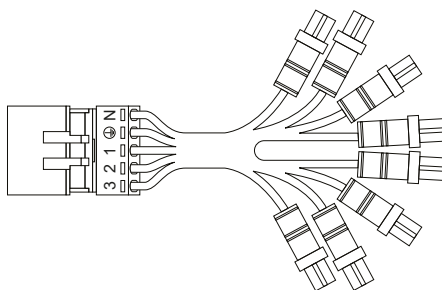

Led **Cable**

LC-5m

L - 5 m

0.58 kg

LC-6m

L - 6 m

0.69 kg

LC-7m

L - 7 m

0.8 kg

LC-8m

L - 8 m

0.92 kg

LC-9m

L - 9 m

1.03 kg

LC-10m

L - 10 m

1.14 kg

LC-12m

L - 12 m

1.37 kg

LC-14m

L - 14 m

1.6 kg

LC-16m


L - 16 m

1.82 kg

LC-18m

L - 18 m

2.05 kg

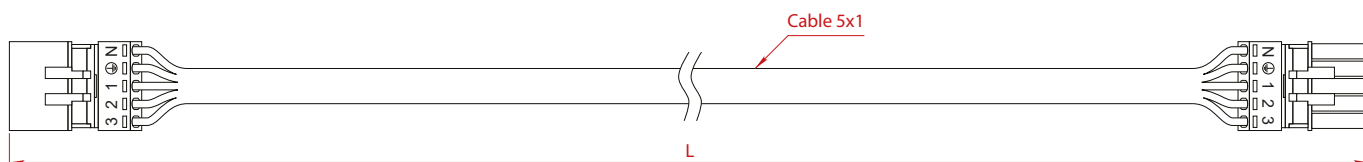

SET

L3-1500-24-SET

24.2 kg

Including:






1 L3-1500-24

4 LS-8

4 LC-6m

4 LC-9m

4 LC-12m

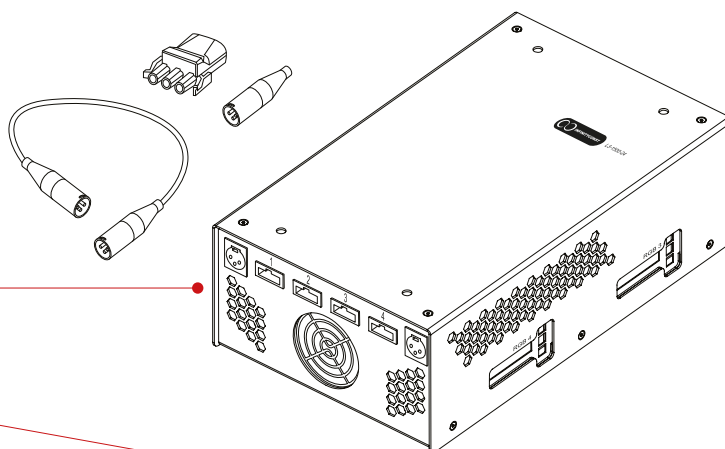

TS

TS-EVO-60-01

1.3 kg

Including:

- 1 Pneumatic wrench 3/8"
- 1 Ratched handle wrench 1/4"
- 1 Hex bit socket 6mm 3/8"
- 1 Hex bit socket 6mm 1/4"
- 1 Hex bit socket 4mm 1/4"
- 1 Hex ball-tipped screwdriver 6 mm
- 1 Hex ball-tipped screwdriver 3 mm
- 1 Adjustable wrench 0-24 mm
- 1 Platen
- 9 Plastic plates 30x50x1mm



Transport Container for Connectors

Material : Plywood

TC-C

TC-C-60

Capacity :


C-R, C-T, C-S, C-C - 12 pcs.

C-X - 108 pcs.

CF1 - 24 pcs.

1500 x 220 x 240 mm

11 kg

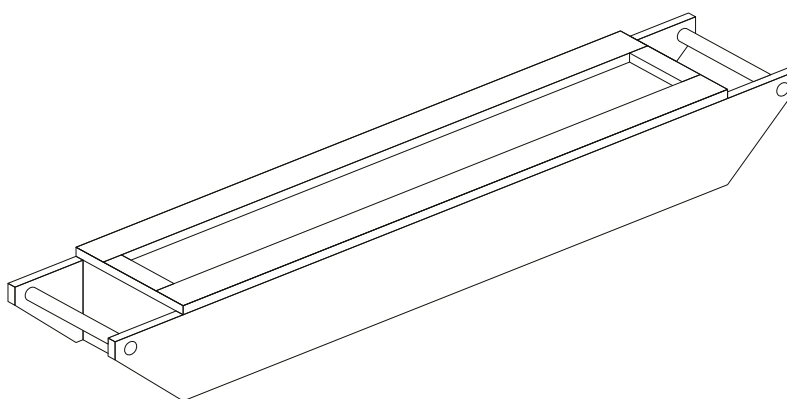

Transport Container for Connector Covers

Material : Plywood

TC-CC

TC-CC-60

Capacity:

CC2-C - 98 pcs.


CC2-RTS - 70 pcs.

CC4-C - 63 pcs.

CC4-RT, CC4-S - 42 pcs.

1450 x 275 x 275 mm

12 kg

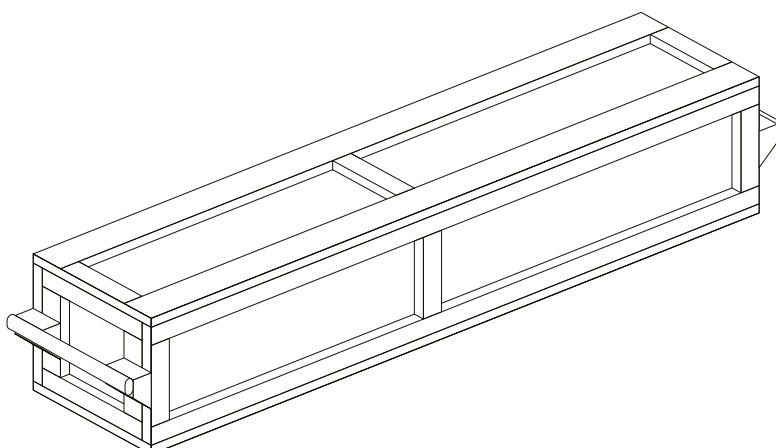

TC-E1

TC-E1-60-180

TC-E1-X-60-360

Capacity - 12 pcs.

1860 x 440 x 450 mm

18 kg

TC-E1-60-240

TC-E1-X-60-480

Capacity - 6 pcs.

2450 x 440 x 370 mm

21 kg

TC-E1-60-300

TC-E1-X-60-600

Capacity - 6 pcs.

3070 x 440 x 450 mm


26 kg

TC-E1-60-360

Capacity - 6 pcs.

3660 x 440 x 480 mm

36 kg

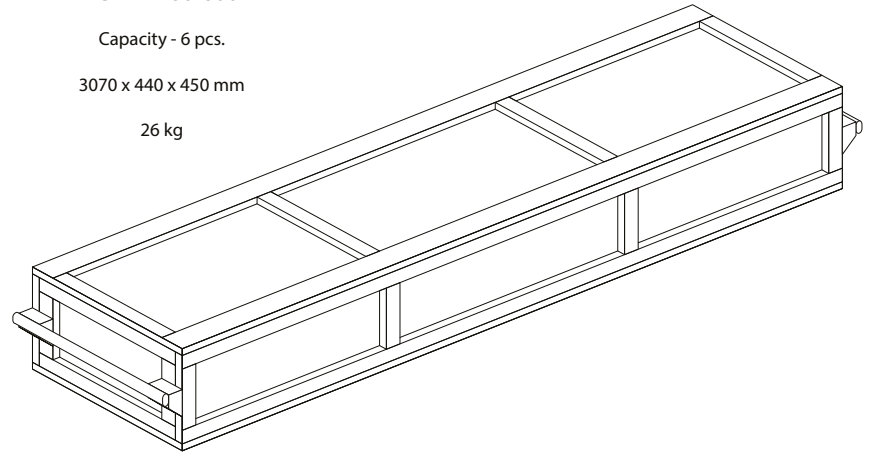

Transport Container for **E2**

TC-E2

TC-E2-60-180

TC-E2-X-60-360

Capacity - 18 pcs.

1370 x 440 x 450 mm

14 kg

TC-E2-60-240

TC-E2-X-60-480

Capacity - 12 pcs.

1830 x 440 x 370 mm

17 kg

TC-E2-60-300

TC-E2-X-60-600

Capacity - 6 pcs.

2270 x 440 x 300 mm


19 kg

TC-E2-60-360

Capacity - 6 pcs.

2710 x 440 x 320 mm

23 kg

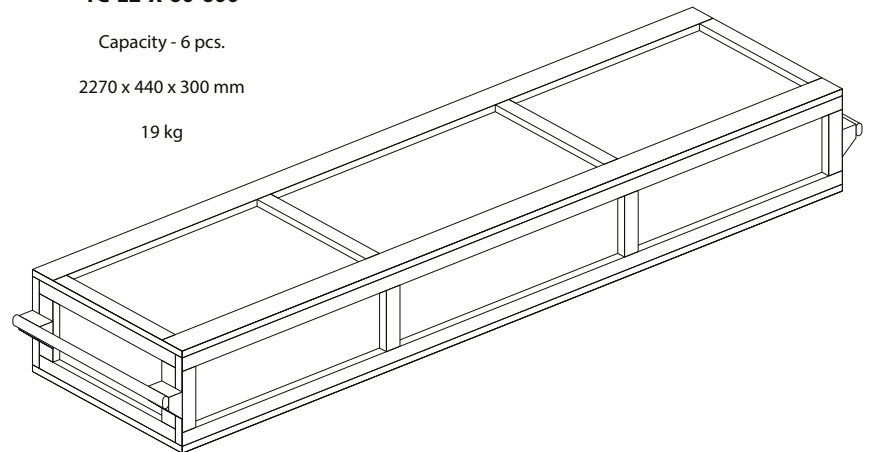

Transport Container for **E3**

TC-E3

TC-E3-60-180

TC-E3-X-60-360

Capacity - 18 pcs.

1370 x 440 x 450 mm

14 kg

TC-E3-60-240

TC-E3-X-60-480

Capacity - 12 pcs.

1740 x 440 x 370 mm

17 kg

TC-E3-60-300

TC-E3-X-60-600

Capacity - 6 pcs.

2170 x 440 x 150 mm


15 kg

TC-E3-60-360

Capacity - 6 pcs.

2590 x 440 x 160 mm

19 kg

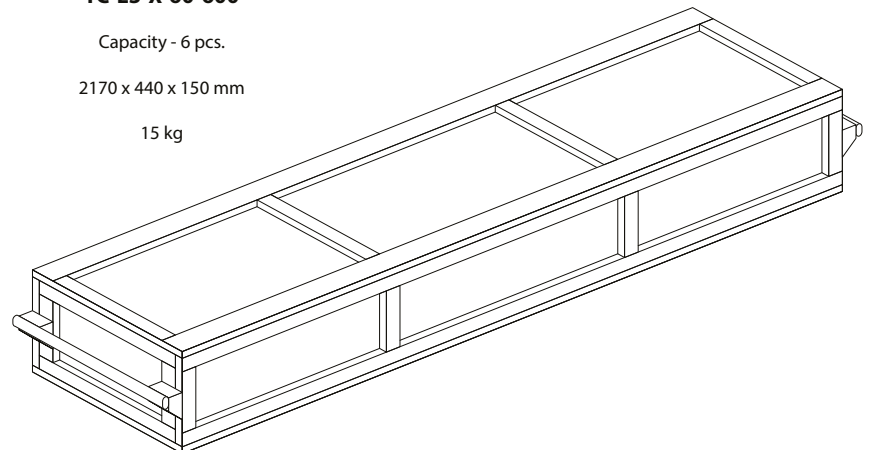

TC-EX-4

For extrusions : EX-1, EX-2, EX-3, EX-4

Material : Plywood

TC-EX-4-60-360

Capacity - 18 pcs.

1430 x 440 x 300 mm

12 kg

TC-EX-4-60-480

Capacity - 12 pcs.

1890 x 440 x 225 mm


14 kg

TC-EX-4-60-600

Capacity - 12 pcs.

2350 x 440 x 225 mm

17 kg

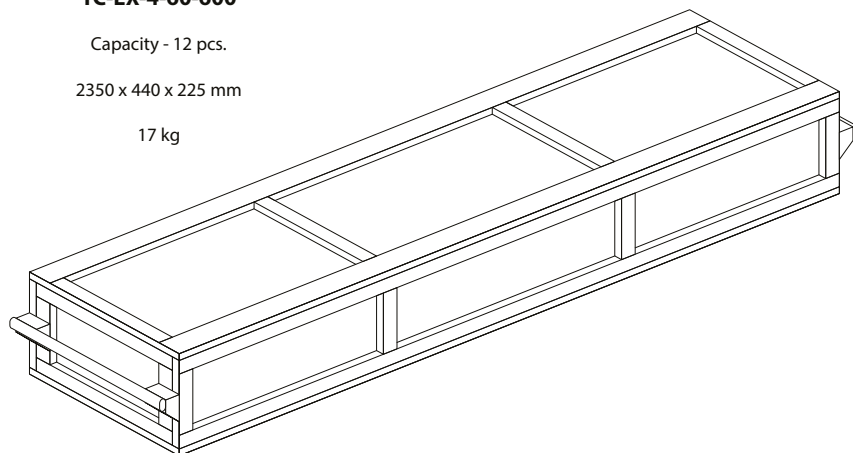
Transport Container for **EX-5**
TC-EX-5

For extrusions : EX-1&2, EX-3&4, EX-5

Material : Plywood

TC-EX-5-60-360

Capacity - 12 pcs.

1980 x 440 x 225 mm

14 kg

TC-EX-5-60-480

Capacity - 12 pcs.

2630 x 440 x 225 mm


18 kg

TC-EX-5-60-600

Capacity - 6 pcs.

3270 x 440 x 150 mm

20 kg

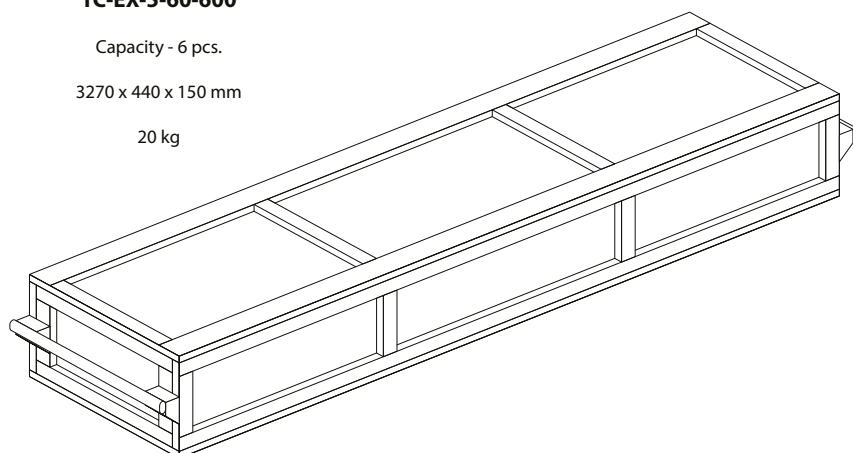
Transport Container for **Static Elements**
TC-SE


Material : Plywood

TC-SE

Capacity - 50 kg

900 x 700 x 800 mm

38 kg

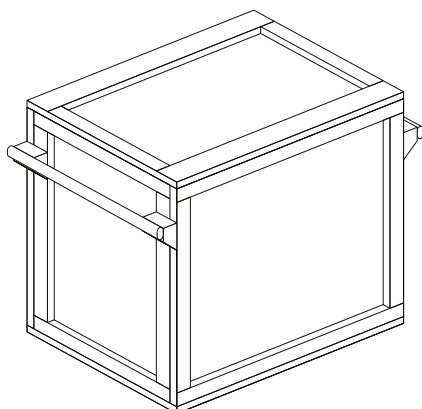
Transport Container for **Fabric**
TC-F


Material : Cardboard

TC-F

Capacity - 30 kg

600 x 400 x 510 mm

0.5 kg

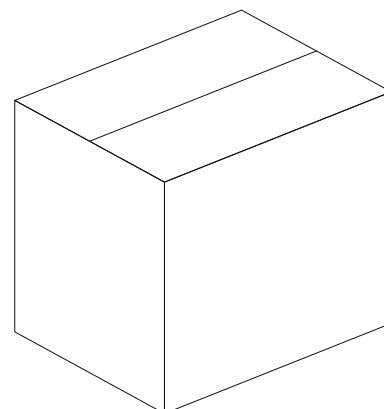

TC-L1
TC-L1-24-180

Capacity - 66 pcs.

2060 x 440 x 90 mm

15 kg

TC-L1-24-240

Capacity - 66 pcs.

2900 x 440 x 90 mm

21 kg

TC-L1-24-300

Capacity - 66 pcs.

3460 x 440 x 90 mm


23 kg

TC-L1-24-360

Capacity - 66 pcs.

3860 x 440 x 90 mm

31 kg

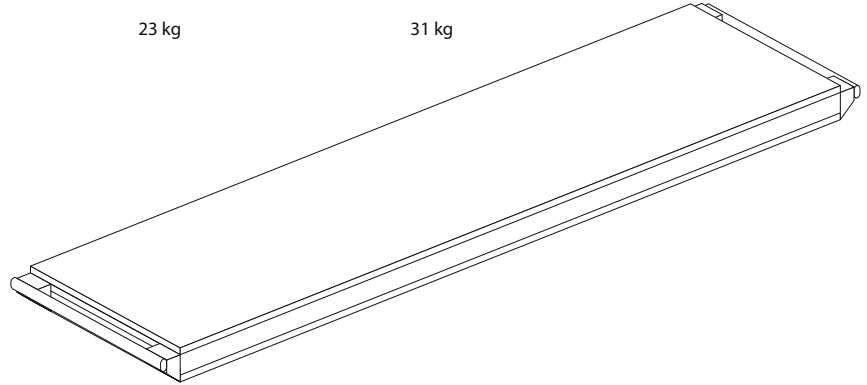
Transport Container for **L2**
TC-L2
TC-L2-24-180

Capacity - 132 pcs.

2900 x 440 x 90 mm

21 kg

TC-L2-24-240

Capacity - 66 pcs.

2060 x 440 x 90 mm

15 kg

TC-L2-24-300

Capacity - 66 pcs.

2460 x 440 x 90 mm


17 kg

TC-L2-24-360

Capacity - 66 pcs.

2900 x 440 x 90 mm


21 kg

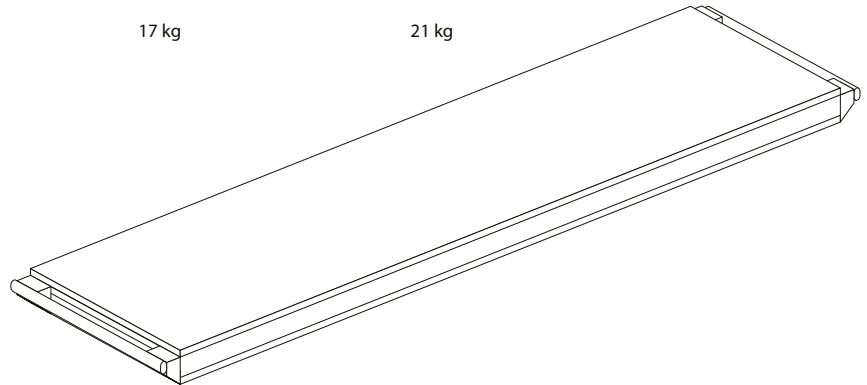
Transport Container for **L3**
TC-L3
TC-L3-1500-24

Capacity - 2 pcs.

1500 x 310 x 220 mm

12 kg

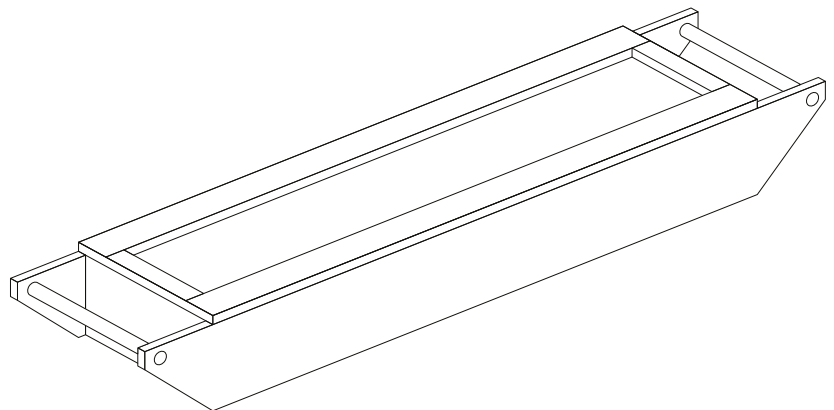

created by



Exhibition Interior Architecture

INFINITYCONST Russia

Head Office

LLC STUDIO DEGA
198255, Russia, Saint-Petersburg,
Leni Golikova street, 82.
E-Mail: info@infinityconst.com
Phone: +7 (812) 240-11-17

INFINITYCONST Europe

Representation in Europe

INFINITYCONST GmbH
Eschenweg 2, D-30880 Laatzen, Germany.
E-Mail: info@infinityconst.de
Phone: +49 5102 931-778, -779
Fax: +49 5102 931774

INFINITYCONST Japan

Representation in Japan

Nishio Rent All, Co., Ltd.
RA East Sales Dept.
3-20-20, Kaigan, Minato-ku, Tokyo, 108-0022, Japan.
E-mail: tetsuya.inaba@nishio-rent.co.jp
Phone: +81-3-5765-9240
Fax: +81-3-5765-3240

