

created by


 **studio dega**
Exhibition Interior Architecture

198205, Russia, Saint-Petersburg,
Rabochaya street (Staro-Panovo), 7
Phone: +7 (812) 331-74-27
Mobile: +7 (921) 405-69-51
E-mail: info@infinityconst.com
www.infinityconst.com


WWW.STUDIODEGA.RU

INFINITY CONSTRUCTIVE EVOLUTION

INFINITYCONST **evo**
Modular exhibition system

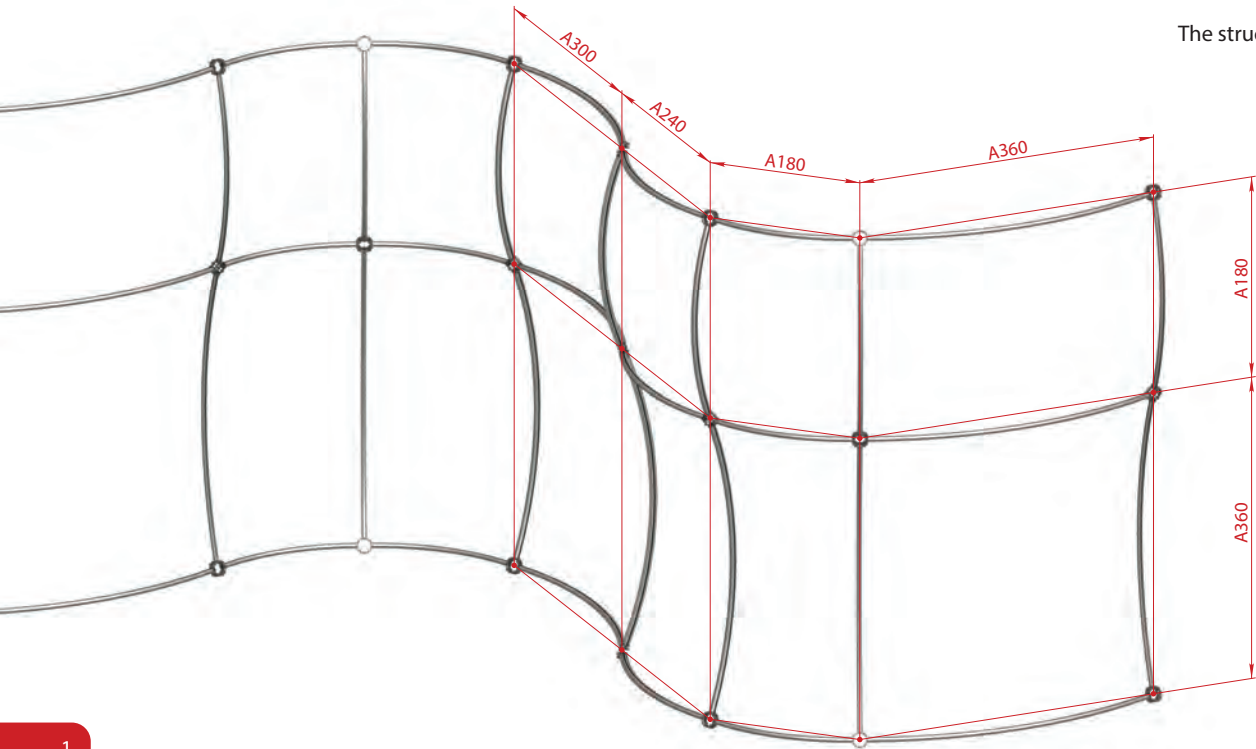


The structure with mixed axis sizes

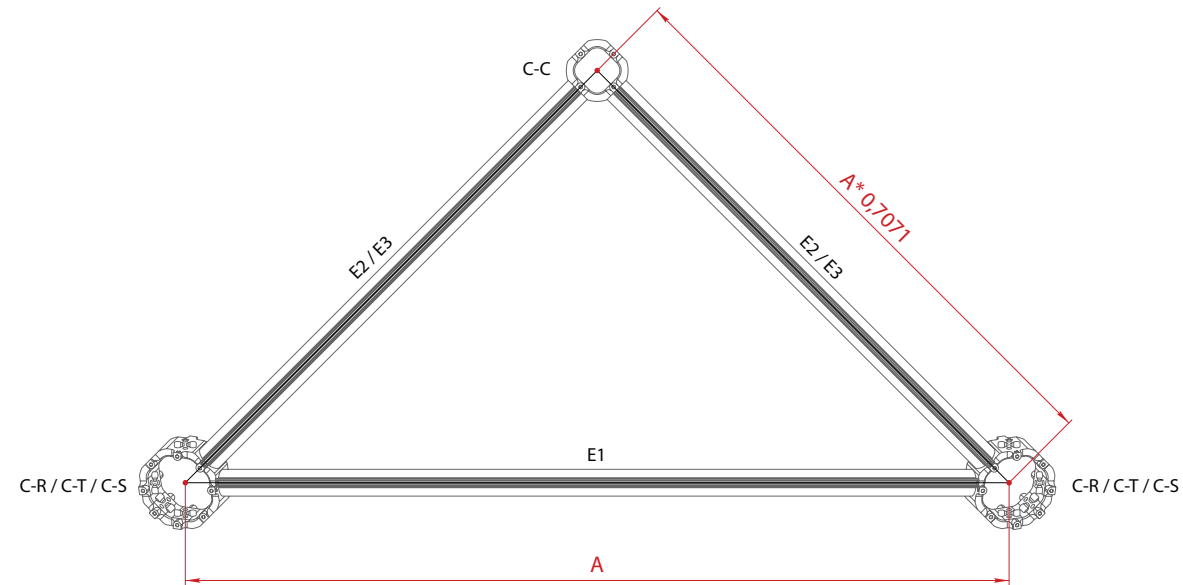






The system can be manufactured with axis size A - 180, 240, 300, 360 sm
Other axis sizes - on request

C-C-60




C-R-60 / C-T-60 / C-S-60



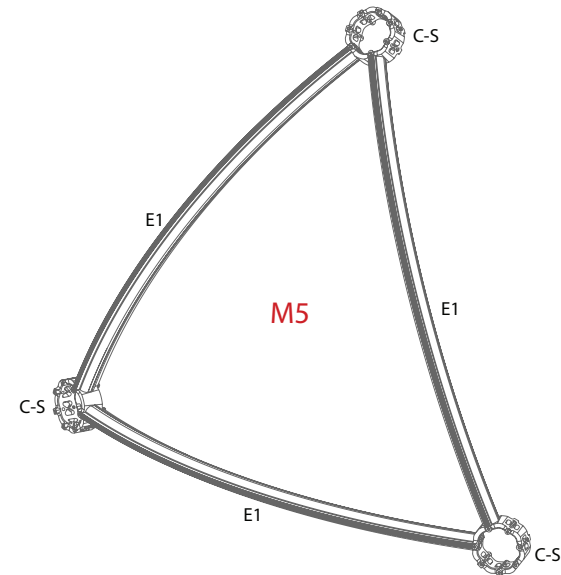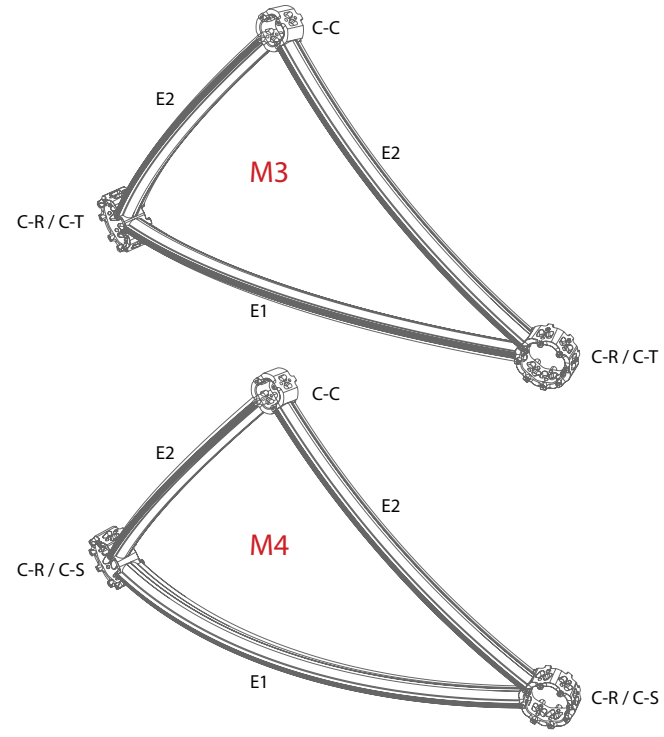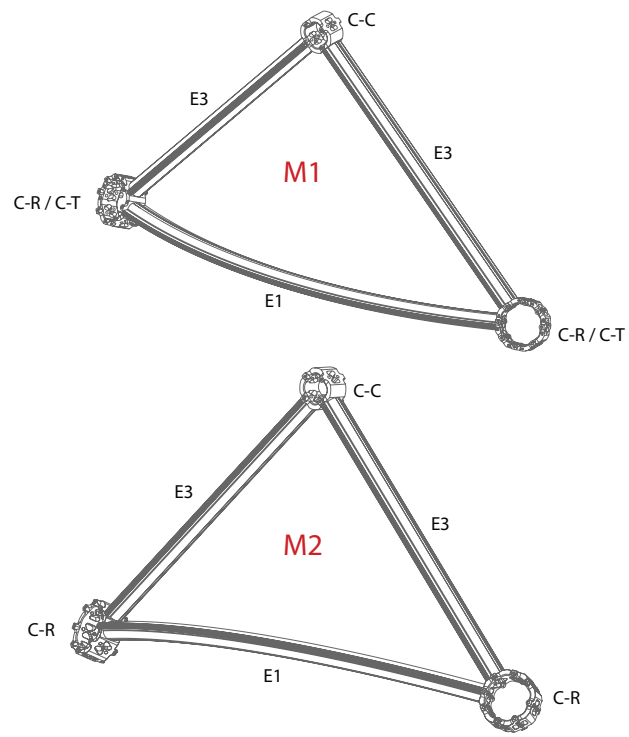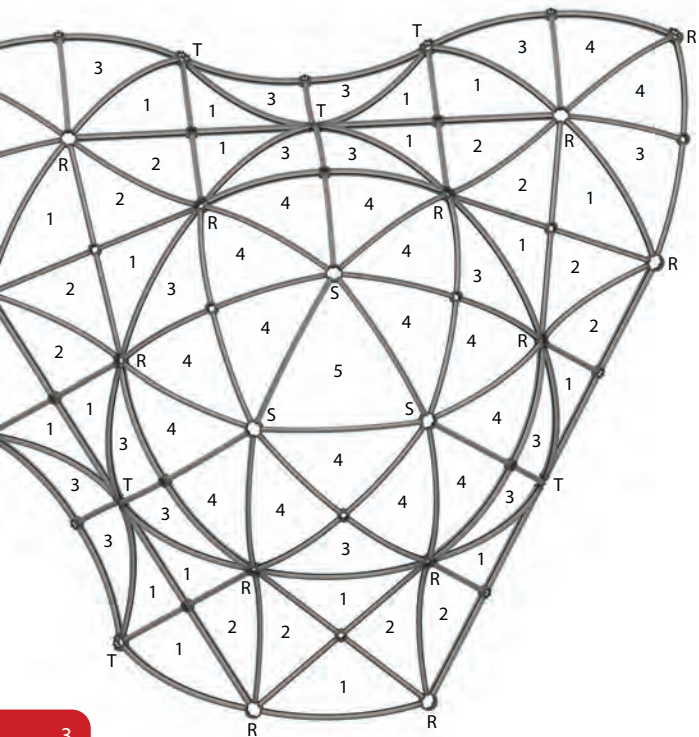

Aluminium Extrusion Ø60

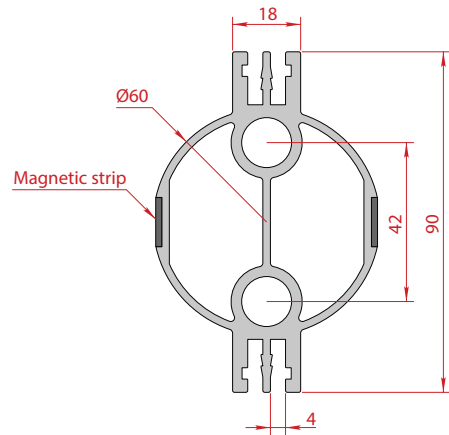


Including fixing set:


4 screws M10x30




E1

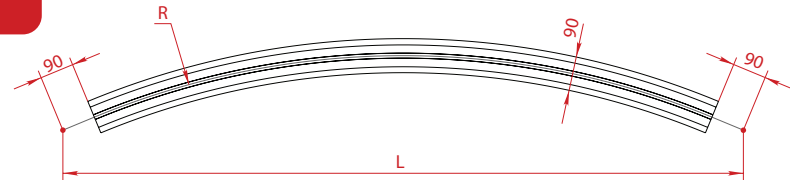

E2

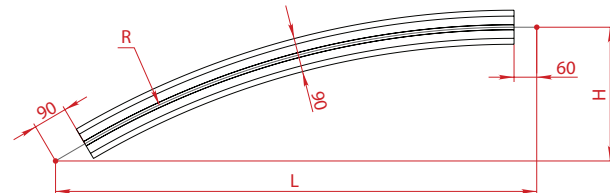

E3



A180

E1-60-180

L-1800mm R-2135mm

4.46kg

A240

E1-60-240

L-2400mm R-2918mm

6.1kg

A300

E1-60-300

L-3000mm R-3702mm

7.73kg

A360

E1-60-360

L-3600mm R-4486mm

9.37kg

E2-60-180

L-1273mm R-2246mm H-353mm

3.17kg

E2-60-240

L-1697mm R-3085mm H-469mm

4.35kg

E2-60-300

L-2121mm R-3925mm H-584mm

5.53kg

E2-60-360

L-2546mm R-4764mm H-699mm

6.71kg

E3-60-180

L-1273mm

2.99kg

E3-60-240

L-1697mm

4.12kg

E3-60-300

L-2121mm


5.24kg

E3-60-360

L-2546mm

6.37kg

Aluminium Extrusion for Keder

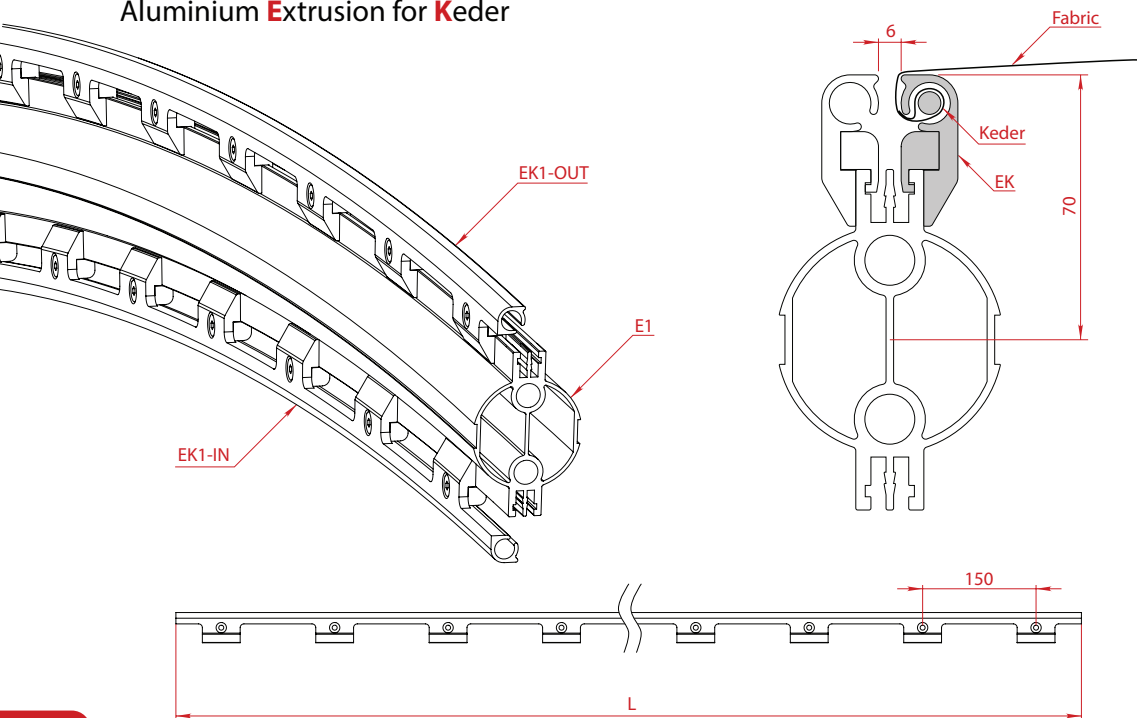

EK1-OUT

A180

EK1-OUT-180
L-1724mm
0.95kg

A240

EK1-OUT-240
L-2340mm
1.29kg

A300

EK1-OUT-300
L-2954mm
1.62kg

A360

EK1-OUT-360
L-3570mm
1.96kg

EK1-IN

EK1-IN-180
L-1626mm
0.89kg

EK1-IN-240
L-2242mm
1.23kg

EK1-IN-300
L-2856mm
1.57kg

EK1-IN-360
L-3472mm
1.91kg

EK2-OUT

EK2-OUT-180
L-1222mm
0.67kg

EK2-OUT-240
L-1666mm
0.92kg

EK2-OUT-300
L-2112mm
1.16kg

EK2-OUT-360
L-2556mm
1.41kg

EK2-IN

EK2-IN-180
L-1156mm
0.64kg

EK2-IN-240
L-1600mm
0.88kg

EK2-IN-300
L-2044mm
1.12kg

EK2-IN-360
L-2490mm
1.37kg

EK3

EK3-180
L-1122mm
0.62kg

EK3-240
L-1546mm
0.85kg


EK3-300
L-1970mm
1.08kg

EK3-360
L-2394mm
1.31kg

C-R


C-R-60
for extrusions Ø60

Stainless steel AISI 321
4,15 kg

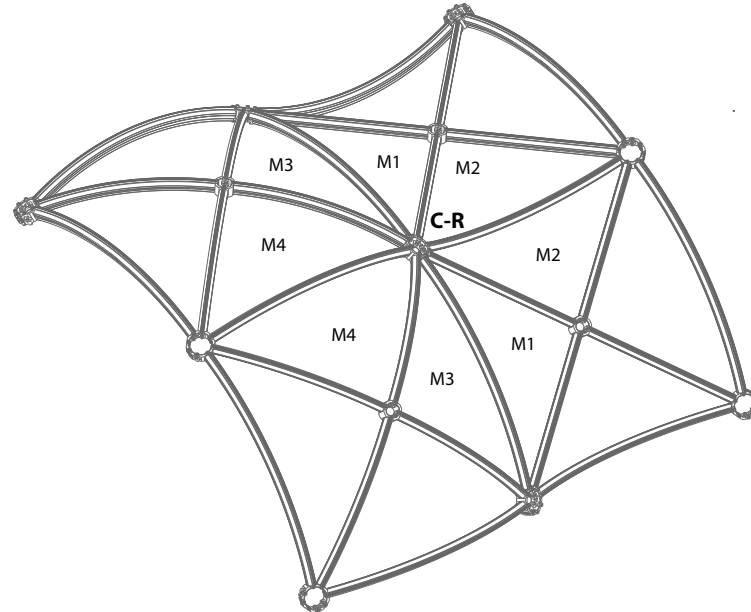**C-T**

C-T-60
for extrusions Ø60


Stainless steel AISI 321
4,15 kg

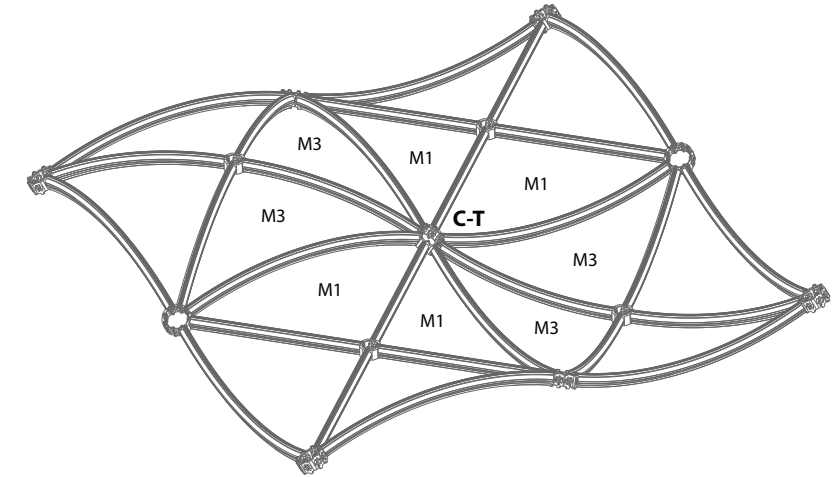

C-S


C-S-60
for extrusions Ø60

Stainless steel AISI 321
4,31 kg

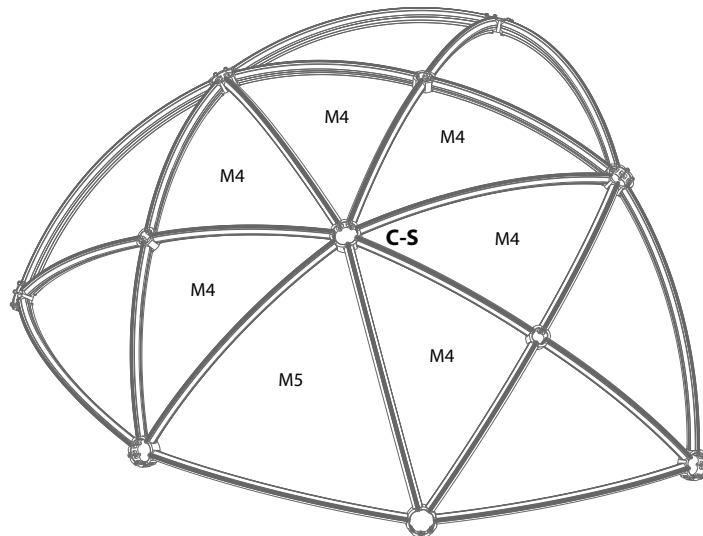
**C-C**

C-C-60
for extrusions Ø60

Stainless steel AISI 321
3,01 kg

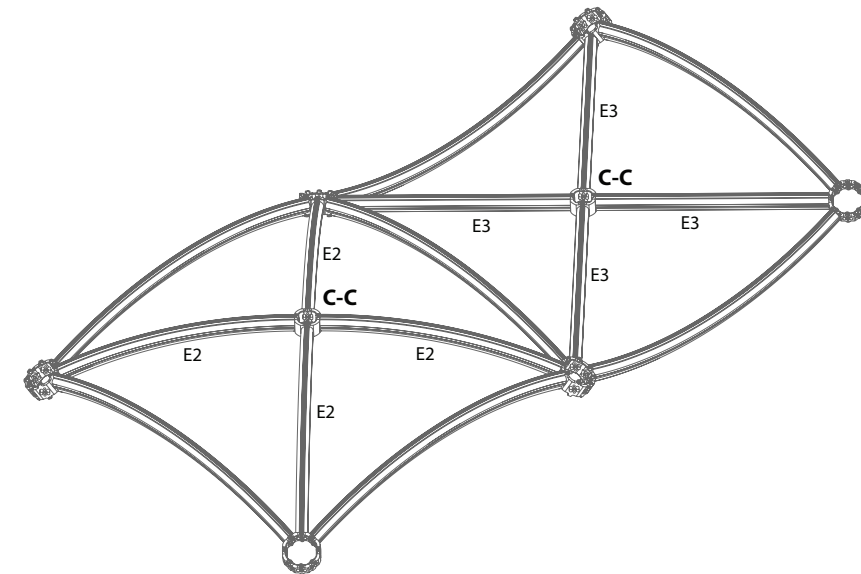

CF1

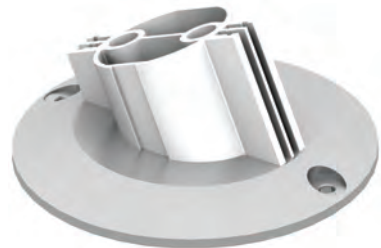



CF1-60

Foot for connectors RTS

Stainless steel AISI 304 and Aluminium
1,58 kg

Including fixing set:

2 screws M10x30

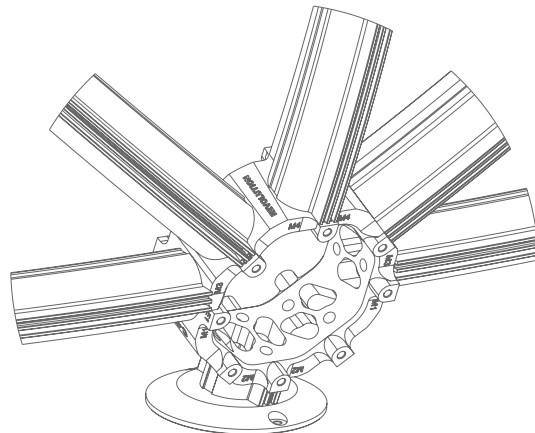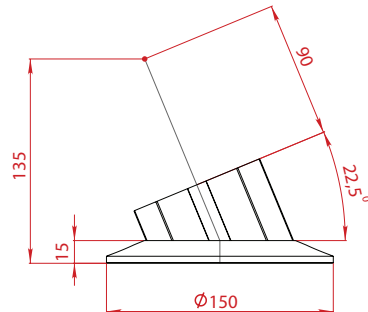

CA1

The adapter for integration with cubic systems Burkhardt Leither, Mero, Modul etc.





CA1-60

Adapter for connectors RTS

Stainless steel AISI 304
0,24 kg

Including fixing set:

1 screw M10x20


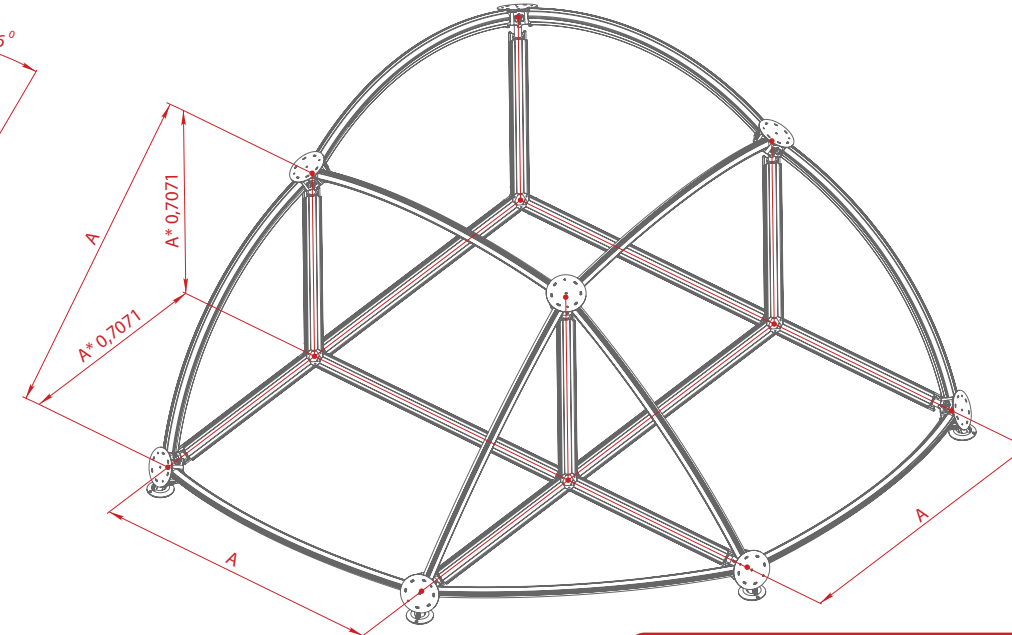



Outdoor **C**over for **C**onnectors **RTS****CC1-RTS****CC1-RTS-60**

Steel and Neoprene
2,16 kg

Including fixing set:




- 8 nuts M10
- 4 screws M8x16
- 4 screws M10x60
- 4 springs Ø35x52
- 4 washers with EPDM 10,5x25

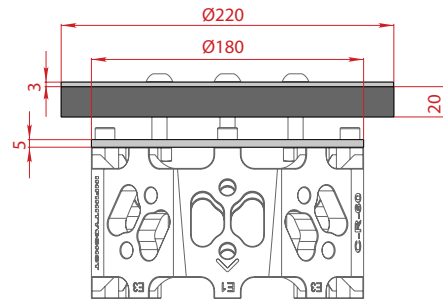Outdoor **C**over for **C**onnectors **C****CC1-C****CC1-C-60**

Steel and Neoprene
1,12 kg

Including fixing set:


- 2 nuts M10
- 4 screws M8x16
- 1 screw M10x60
- 1 spring Ø35x52
- 1 washer with EPDM 10,5x25

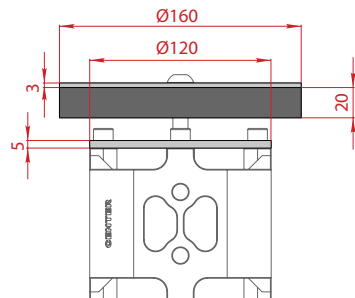**CC2-RTS****CC2-RTS-60**

Steel
0,85 kg

Including fixing set:


- 2 screws M8x16

**CC2-C****CC2-C-60**

Steel
0,46 kg

Including fixing set:



- 2 screws M8x16

Indoor **C**over for **C**onnectors **RTS****CC3-RTS****CC3-RTS-60**


Steel
0,56 kg

Including fixing set:

- 2 screws M8x16

Indoor **C**over for **C**onnectors **C**

SE-B

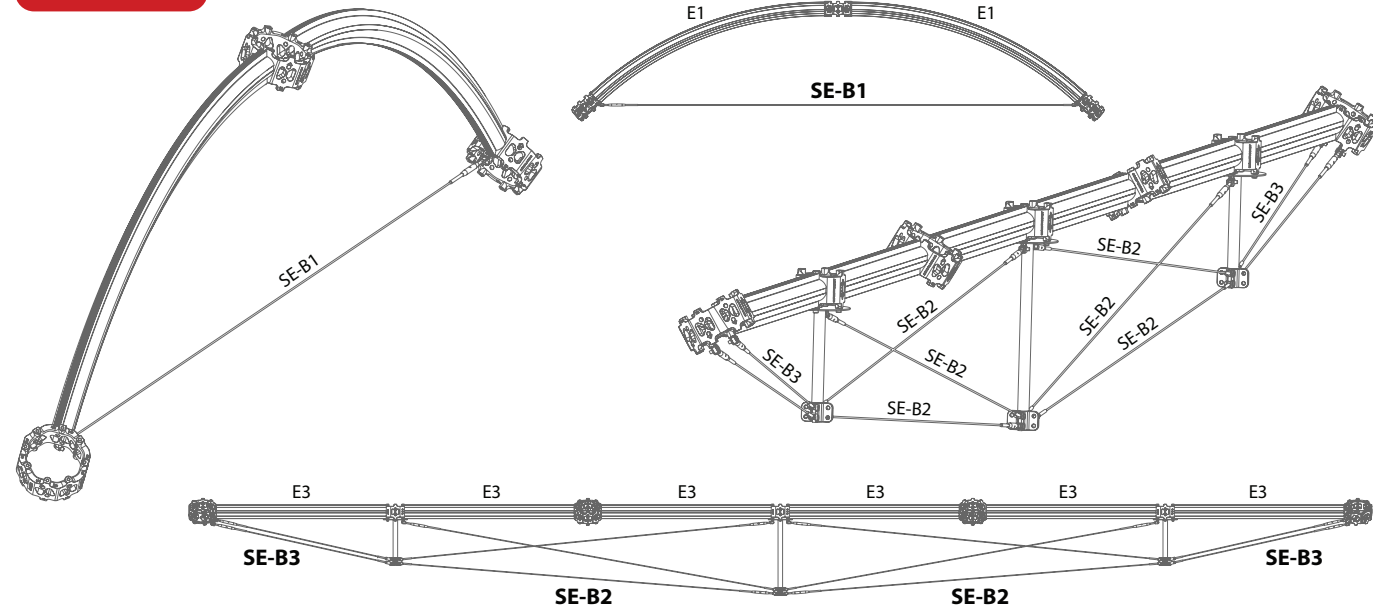

SE-C

SE-C30
Console L-300mm

Stainless steel AISI 304
2,05 kg

Including fixing set:

1 screw M10x20




SE-C50
Console L-500mm

Stainless steel AISI 304
3,18 kg

Including fixing set:

1 screw M10x20

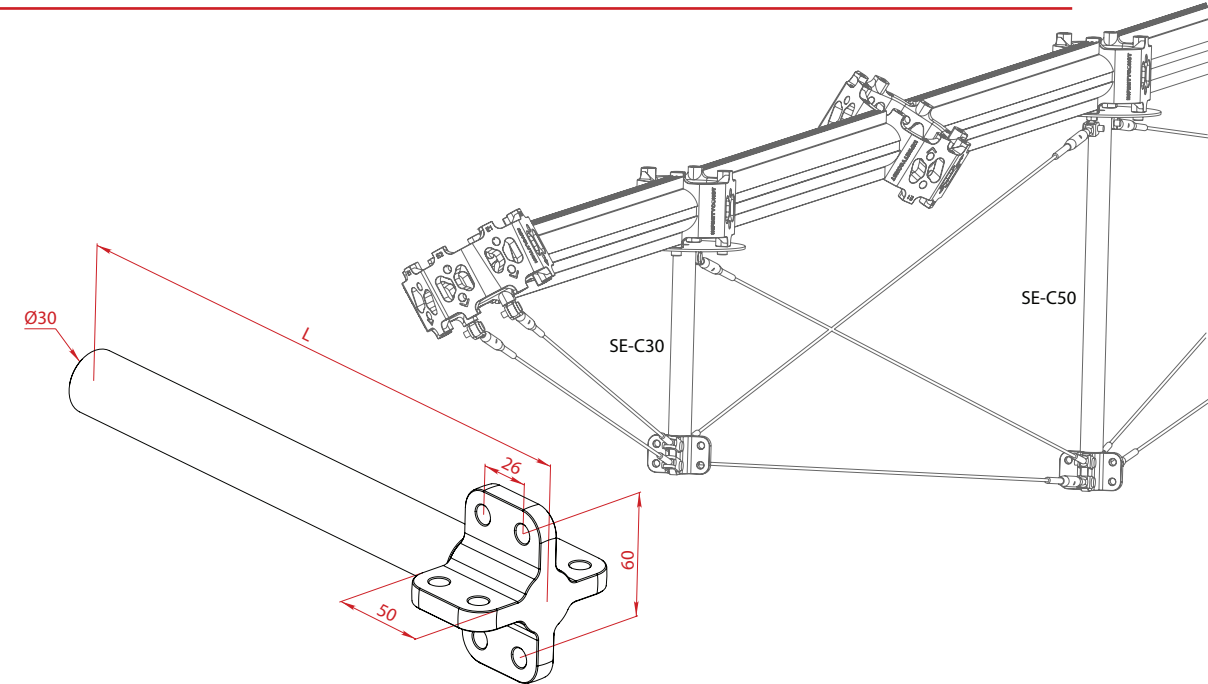

Indoor **F**abric

F


Stretch fabric with silicone strip
B1 by DIN 4102

F1-4

For modules M1, M2, M3, M4

F5

For module M5

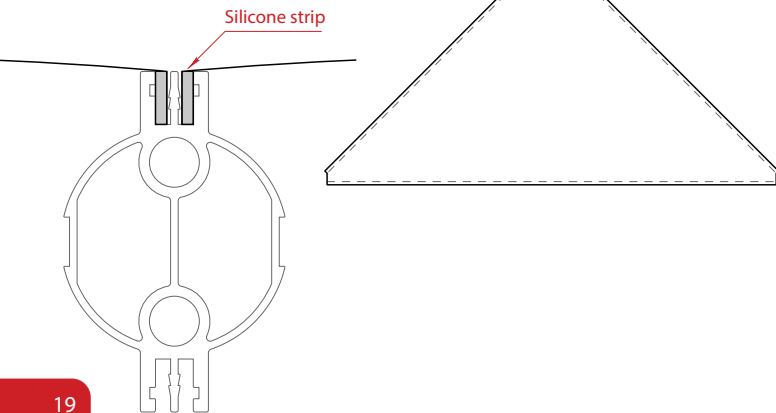

Indoor **F**abric with **H**ole

FH


Stretch fabric with silicone strip
B1 by DIN 4102

FH1-4

For modules M1, M2, M3, M4

FH5

For module M5

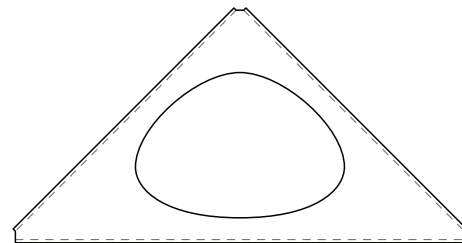

Outdoor **F**abric with **K**eder

FK

Flex waterproof fabric
BS6807 and BS7175 GRIB5

FK1/3

For modules M1 and M3

FK2


For module M2

FK4

For module M4

FK5


For module M5

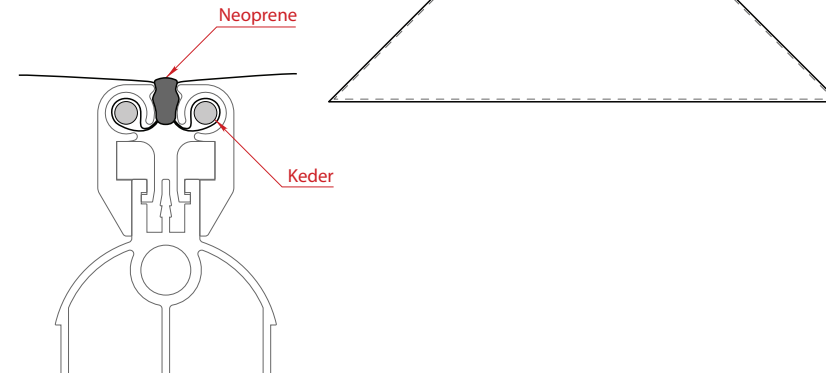

Outdoor Air **L**ens

FL

Architectural structure can be covered by Air Lens System

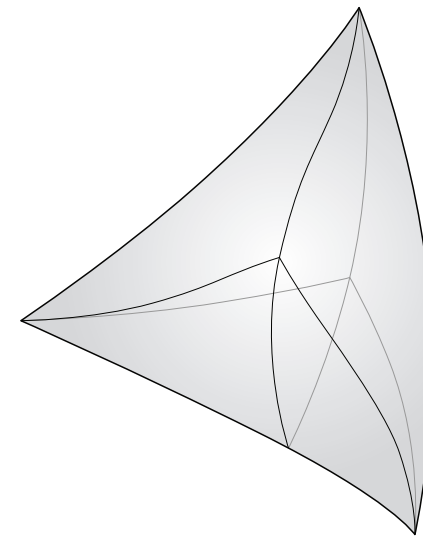

Led strip for E1

L1

A180

A240

A300

A360

L1-24-180

L-1500mm
0.19kg

L1-24-240

L-2166mm
0.27kg

L1-24-300

L-2833mm
0.35kg

L1-24-360

L-3333mm
0.41kg

Led strip for E2 and E3

L2

A180

A240

A300

A360

L2-24-180

L-1000mm
0.12kg

L2-24-240


L-1500mm
0.19kg

L2-24-300

L-1833mm
0.23kg

L2-24-360

L-2333mm
0.29kg

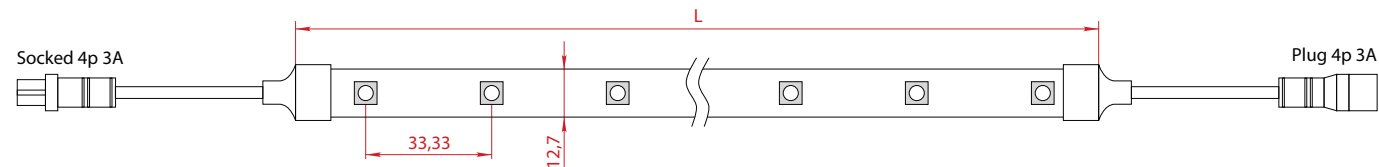


RGB 24V DC IP 65 | 30 leds/m | 6,1W/m | on magnet | max. 12m in series

Led cable Splitter

LS


LS-8

0,06 kg

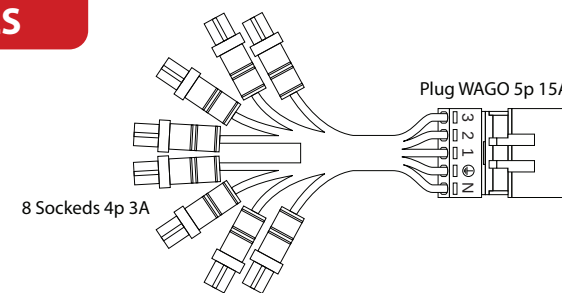

LC

Cables can be manufactured with L 1-20m

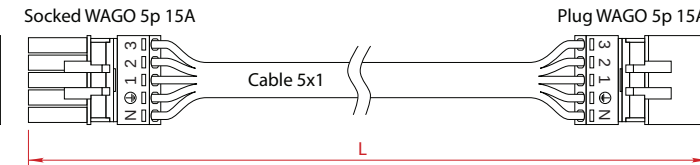


Led control module


L3

L3-1500-24

430 x 260 x 140 mm
11,6 kg

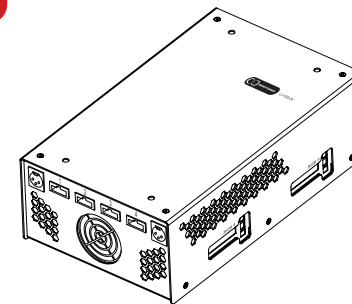

Power input 100-240V AC 1500W 20A | 4 RGB OUT 24V DC 360W 15A | DMX IN and OUT

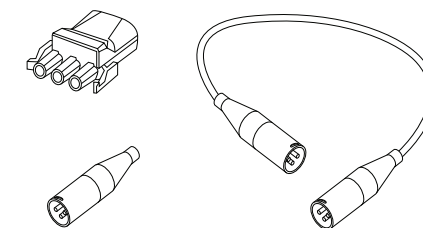

Including:

1 connector NAC32S.W ENSTO

1 XLR3 DMX terminator

1 XLR3-XLR3 cable L-500mm

Uniform control of one or several modules by master DMX controller (not included)
Recommended master DMX controllers: Nicolaudio STICK-DE3 and SLESA-U8

Led System